
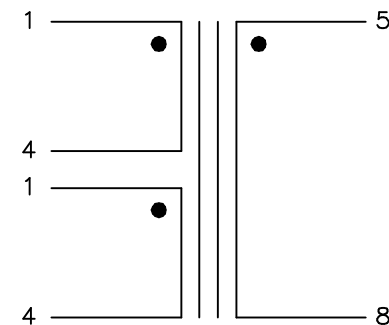
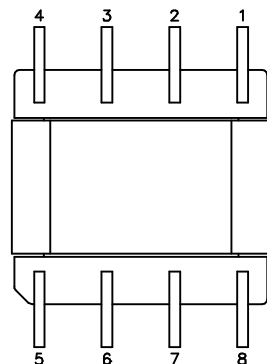

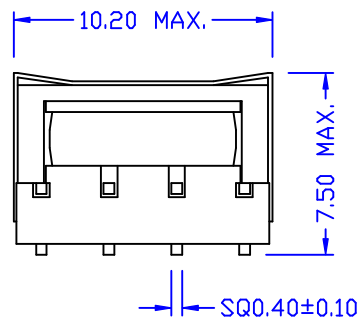


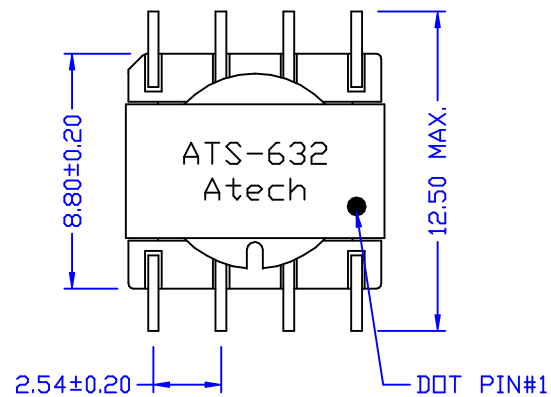

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = $100 \text{ m}\Omega \pm 12\%$
PIN 5-8 = $100 \text{ m}\Omega \pm 12\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 = $225 \mu\text{H}$ MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (5-8 SHORT) = $0.4 \mu\text{H}$ MAX.
- CW (@100KHZ, 0.1Vrms) : PIN 1-5 = 15 pF MAX.
- TURN RATIO (@1.1MHZ, 0.1Vrms) : PIN 1-4 : PIN 5-8 = $1 \pm 1\%$
- HI-POT (@1.5KVAC, 1mA, 1SEC) : PIN 1-5 1-CORE 5-CORE

						Atech®		TITLE	
						Atech Technology Co., Ltd.		TRANSFORMER	
						TEL:02-2794-6667 FAX:02-2794-8004		DWG. NO.	
								ATS-632	
	RELEASE	11/21/2002	DOLLY	SIMON	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
						DATE			
REVISIONS						11/21/02	DRAW		Pair