

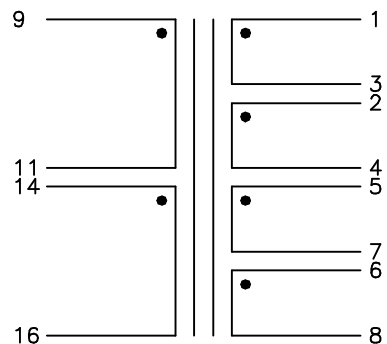
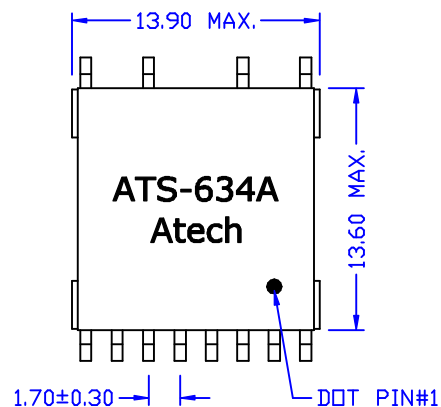


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 2-4 = 94mΩHM ±12%
PIN 5-7 = 6-8 = 130mΩHM ±12%
PIN 9-11 = 14-16 = 310mΩHM ±12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 9-16 (11-14 SHORT) = 700uH ± 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 9-16 (1-3 2-4 5-7 6-8 11-14 SHORT) = 10uH MAX.
- TURN RATIO (@800KHZ, 1Vrms) :
PIN 9-16 (11-14 SHORT) : PIN 1-4 (2-3 SHORT) = 4 ± 1%
PIN 9-16 (11-14 SHORT) : PIN 5-8 (6-7 SHORT) = 2 ± 1%
- HI-POT (@1875VAC, 500uA, 1SEC) : P-S

						Atech®		TITLE ADSL HYBRID TRANSFORMER	
B	DIM	03/28/2003	pair	al	suedy	Atech Technology Co., Ltd.		DWG. NO.	
A	t/r spec.	03/04/2003	pair	al	suedy	TEL:02)2794-6667 FAX:02)2794-8004		ATS-634A	
	RELEASE	01/15/2003	DOLLY	KEVIN	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M			DRAW
REVISIONS						DATE	01/15/03		Pair