
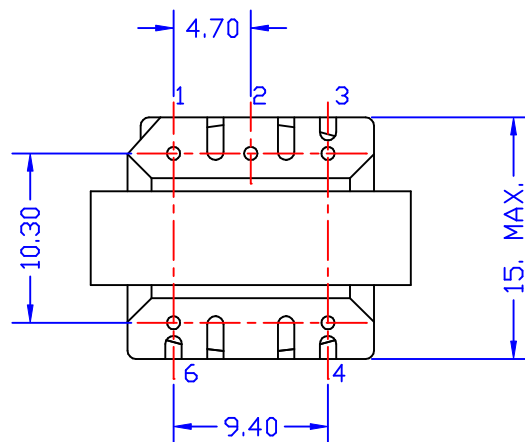
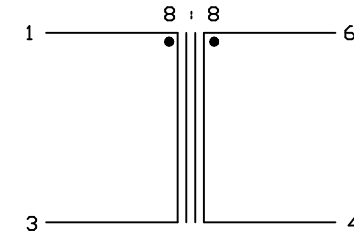


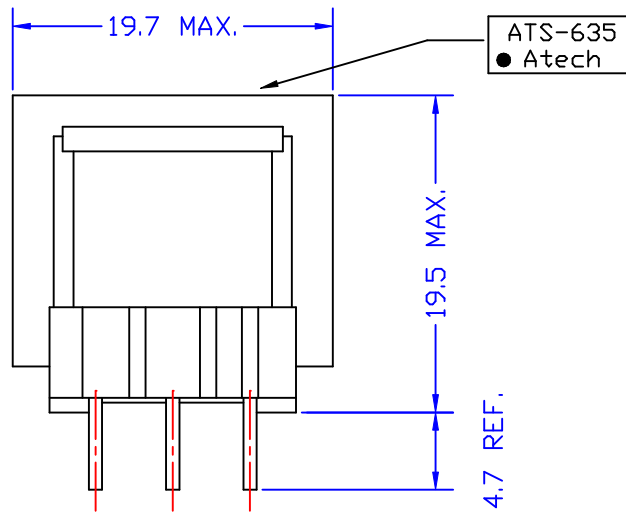

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 4-6 = 780 mΩ MAX.
2. INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 6.7mH MIN.
3. FREQ. RESP. (@REF 1KHZ, 1Vrms) : @100HZ = ± 1dB
@10KHZ = ± 0.5dB
4. TURN RATIO (@420KHZ, 1Vrms) : PIN 1-3 : PIN 6-4 = 1 ± 1%
5. THD (@1Vrms, 4-6 W/H 8 Ω LOAD) : @300HZ TO 10KHZ < 1%
6. HI-POT (@1.5KVAC, 1mA, 2SEC) : PIN 1-6

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE 8 : 8 TRANSFORMER	
								DWG. NO. ATS-635	
A	DCR & HI-POT	10/08/2003	RORY	AL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1
	RELEASE	12/19/2002	DOLLY	KEVIN	SUEDY				
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/19/02			
REVISIONS								DRAW <i>Pair</i>	