
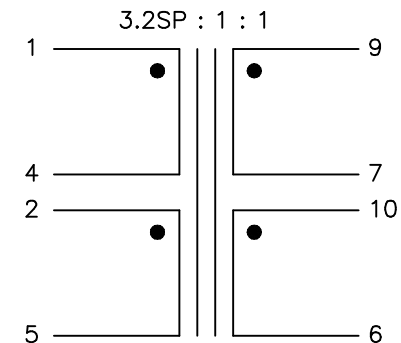
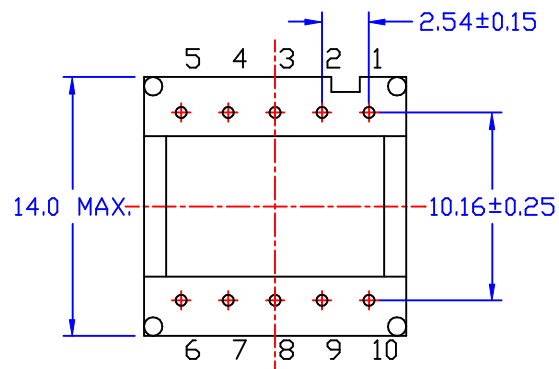
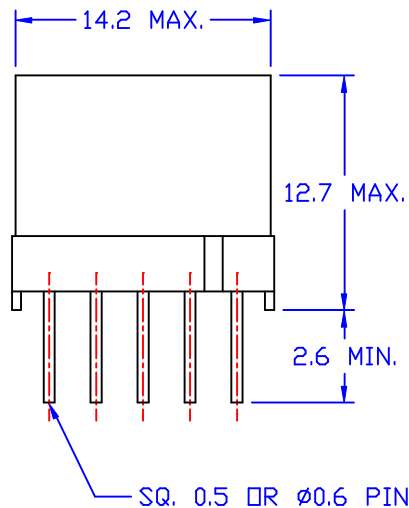


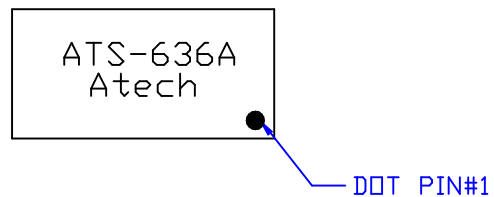

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 2-5 = 1.7 OHM MAX.
PIN 9-7 = 0.7 OHM MAX.
PIN 10-6 = 2.8 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 3mH ± 7%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-5 (2-4 9-7 10-6 SHORT) = 25uH MAX.
- THD (@3KHZ, 0dBm, 9-6 W/H 39 OHM LOAD) :
PIN 1-5 (2-4 7-10 SHORT) = -75dB MAX.
- TURN RATIO (@450KHZ, 1Vrms) :
PIN 1-5 (2-4 SHORT) : PIN 9-7 = 3.2 ± 1%
PIN 1-5 (2-4 SHORT) : PIN 10-6 = 3.2 ± 1%
- HI-POT (@2500VAC, 1mA, 1SEC) : PIN 1-9 (2-4 7-10 SHORT)

						Atech® Atech Technology Co. Ltd. TEL:022794-6667 FAX:022794-8004		TITLE SHDSL LINE TRANSFORMER	
								DWG. NO. ATS-636A	
	RELEASE	03/31/2003	PAIR	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						03/31/03			