
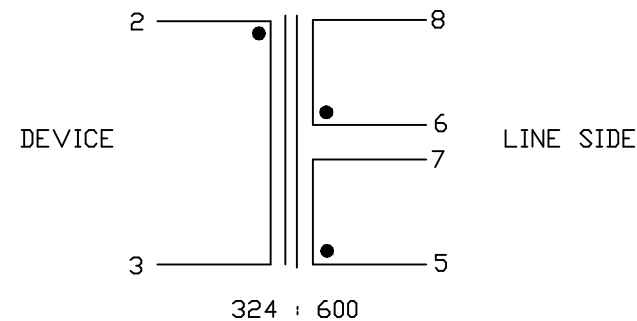
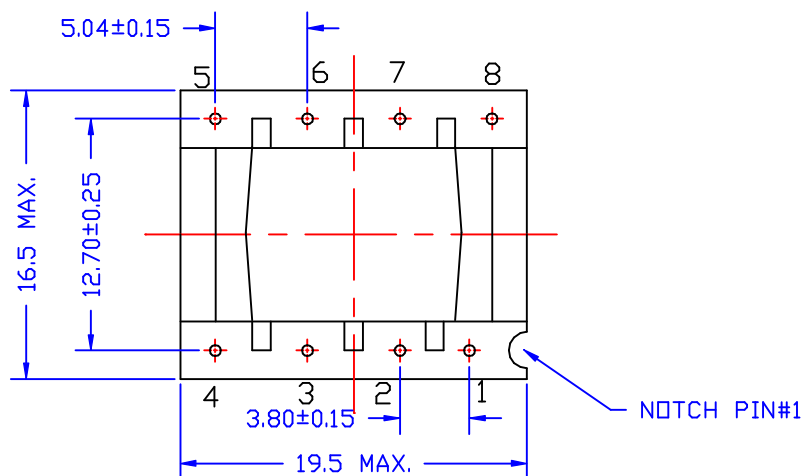


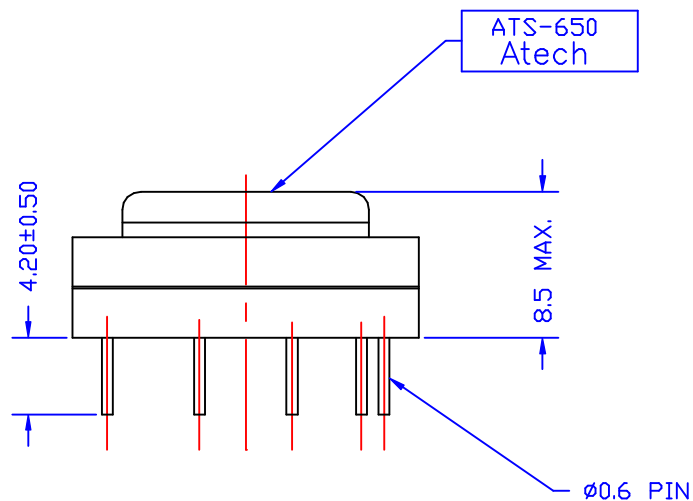

ELECTRICAL CHARACTERISTICS:

- 1 D.C.R. : PIN 2-3 = 170 Ω HM MAX.
PIN 5-7 = 6-8 = 110 Ω HM MAX.
- 2 INDUCTANCE : (1KHZ, 1Vrms, W/H 80mADC)
PIN 2-3 = 120 mH MIN.
- 3 IMPEDANCE = (1KHZ, 1Vrms, W/H 80mADC, PIN 2-3
W/H 324 Ω HM LOAD) PIN 5-8(6-7 SHORT) = 600 Ω HM +/-10%
- 4 INSERTION LOSS : (@1KHZ, 0.78Vrms, W/H 80mADC
PIN 2-3 W/H 324 Ω HM LOAD) PIN5-8(6-7SHORT) = 4.5 dB MAX.
- 5 FREQ. RESP = (REF. 1KHZ) @300HZ = +/-4dB
@3.4KHZ = +/- 1 db
- 6 RETURN LOSS : @300HZ = 7dB MIN. (W/H 80 mADC)
- 7 LOGITUDINAL BALANCE = 60db MIN (AT 1KHZ)
LOGITUDINAL BALANCE = 60db MIN (AT 3.4KHZ.)
- 8 HI-POT (@3750 VAC, 1mA 2SEC) PRI.-SEC.

						Atech®		TITLE 600 : 324 TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.
						TEL:(02)2794-8867 FAX:(02)2794-8004		ATS-650
A	D.C.R.	04/28 /2003	RORY	KEVIN	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	04/25 /2003	PAIR		SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW
REVISIONS						04/25/03		Pair