
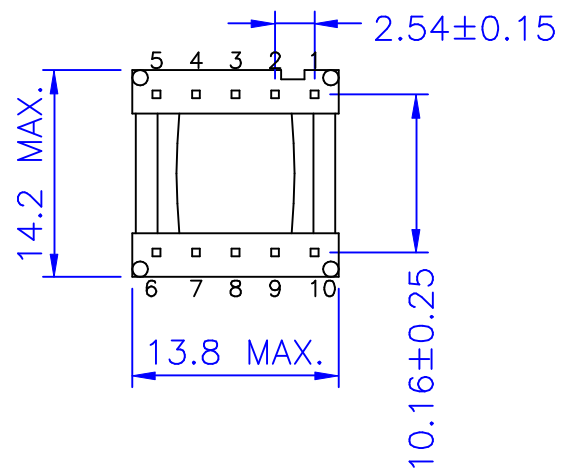
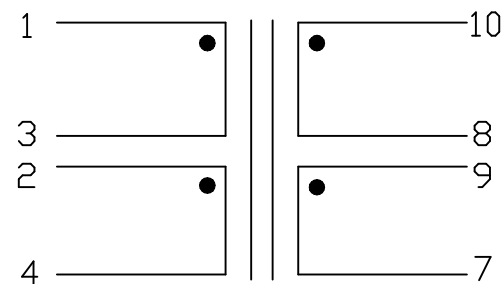



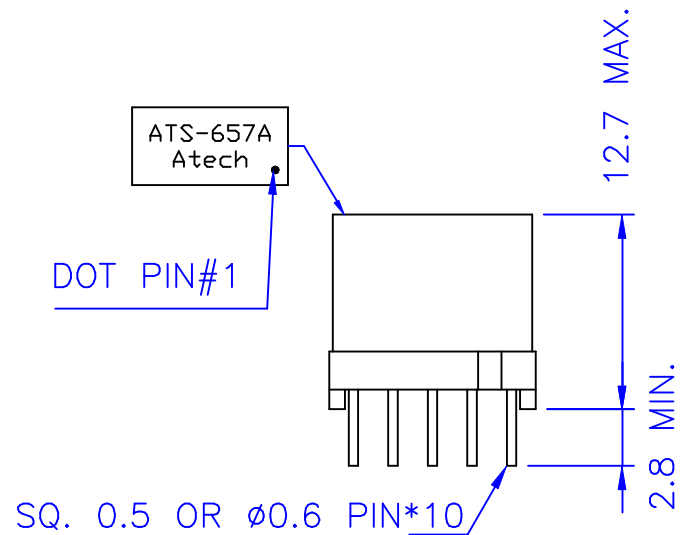

ELECTRICAL CHARACTERISTICS :

1. D.C.R. : 1-3 = 2-4 = 0.25 Ω HM±12%
9-7 = 10-8 = 0.22 Ω HM±12%
2. INDUCTANCE : (@10KHZ, 0.1Vrms) 1-4 (2-3 SHORT) = 400 μ H±5%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms) 1-4 (2-3, 10-8, 9-7 SHORT) = 4 μ H MAX.
4. INTERWINDING CAP. : (@10KHZ, 0.1Vrms) 1-10 (2-3, 8-9, SHORT) = 25pF MAX.
5. LONGITUDINAL BAL. : (@20KHZ-1MHZ) = -55dB MAX.
6. THD : (30KHZ, 1.05Vrms, 2-3, 8-9 SHORT, 10-7 W/H 25 Ω HM) 1-4 = -80dB MAX.
7. TURN RATIO : (@100KHZ, 1Vrms) 1-4 : 10-7 (2-3, 8-9 SHORT) = 2±2%
8. HI-POT : (@1875Vrms, 1mA, 1SEC) 1-10 (2-3, 8-9, SHORT)

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE TRANSFORMER	
							DWG. NO. ATS-657A	
	RELEASE	08/28/2003	PAIR	KEVIN	SUEDY		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD		DATE	
REVISIONS						08/28/03	SHEET 1 OF 1 DRAW <i>Pair</i>	