

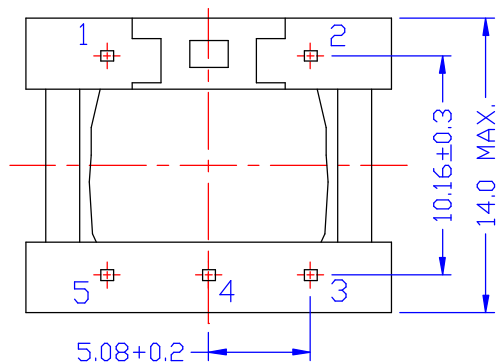


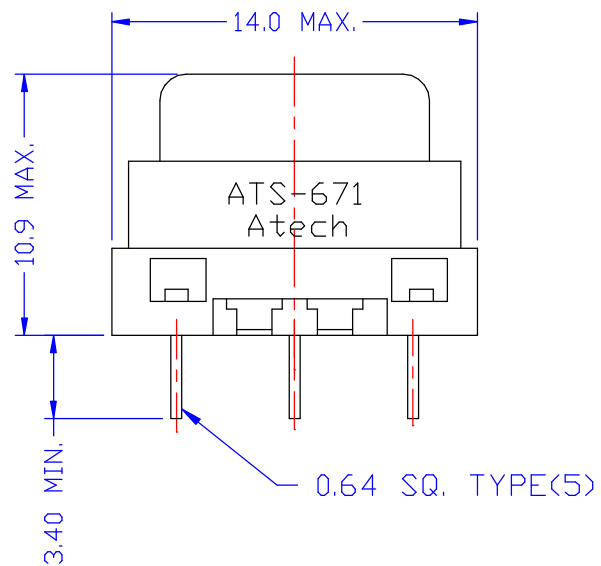

BOTTOM VIEW

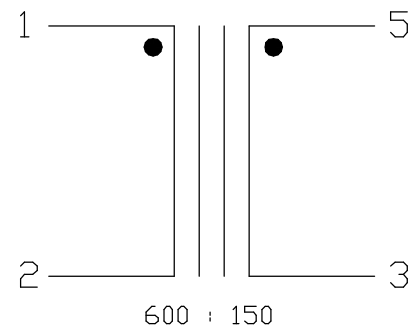

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-5 = 5.3 OHM MAX. PIN 1-2 = 23 OHM MAX.
2. INDUCTANCE : (@300HZ, 1Vrms) 1-2 = 0.8H $\pm$ 20%
3. INSERTION LOSS : (@1KHZ, 0dBm 3-5 W/H 150 OHM) 1-2 = 2.5 dB MAX.
4. FREQ. RESP. : @300HZ = $\pm$ 0.5 dB
@3.4KHZ = $\pm$ 0.3 dB
5. RETURN LOSS : (<REF 600 OHM)
@300HZ = 16 dB MIN.
@900HZ = 16 dB MIN.
@3.4KHZ = 16 dB MIN.
6. TURN RATIO : (@40KHZ, 1Vrms) 1-2 : 5-3 = 2 $\pm$ 1%
7. INSULATION RESISTANCE : (@100VDC) = 500M OHM MIN.

						Atech [®] Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE 600 : 150 TRANSFORMER
A	LABEL	03/02 /2004	BART	AL	SUEDY			DWG. NO. ATS-671
	RELEASE	09/06 /2003	RORY	YEN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW Pair
REVISIONS						09/06/03		