
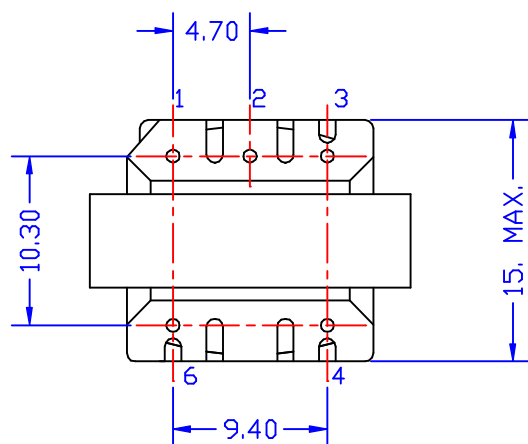
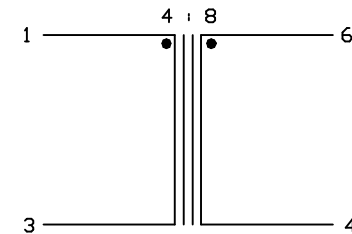


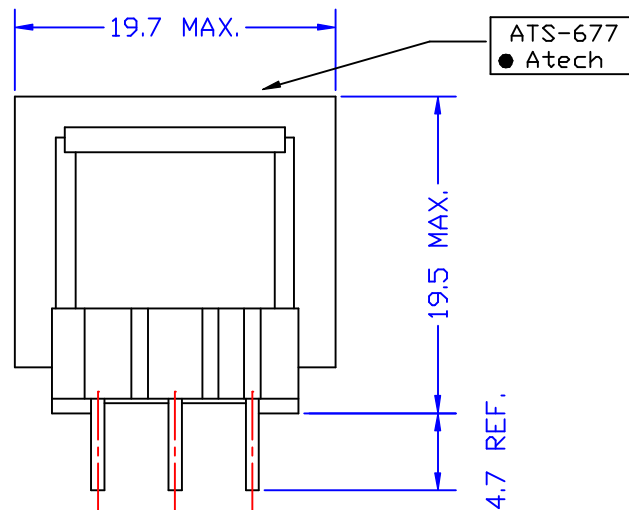

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 0.45 OHM MAX., PIN 4-6 = 0.81 OHM MAX.
- INDUCTANCE (@1KHz, 1Vrms) : PIN 1-3 = 3.4mH MIN.
- INSERTION LOSS (@1KHz, 1Vrms) :
PIN 1-3 (4-6 W/H 8 OHM) = 1.5dB MAX.
- FREQ. RESP. (@REF 1KHZ, 1Vrms) : @100Hz = ± 1 dB
@10KHz = ± 0.3 dB
- TURN RATIO (@5KHz, 1Vrms) : PIN 6-4 : PIN 1-3 = $1.414 \pm 1\%$
- THD (@1Vrms, 4-6 W/H 8 OHM LOAD) : @300HZ TO 10KHZ < 1%
- HI-POT (@1.5KVAC, 1mA, 2SEC) : PIN 1-6

					Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE 4 : 8 TRANSFORMER	
							DWG. NO. ATS-677	
A	DCR & HI-POT	10/08/2003	RORY	AL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
	RELEASE	10/15/2003	RORY	KEVIN	SUEDY			
NO:	DESCRIPTION	DATE	BY	CHK	APPD			
REVISIONS								