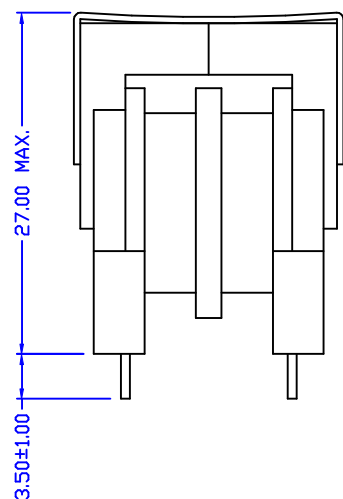



ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-2 = 3-4 = 0.88 OHM MAX.
2. INDUCTANCE (@1KHz, 0.1Vrms) : PIN 1-2 = 20mH $\pm$ 25%
3. TURN RATIO (@60KHz, 1Vrms) : PIN 1-2 : 4-3 = 1 $\pm$ 1%
4. HI-POT (@2000VAC, 1mA, 1MIN) : PIN 1-4

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE 20mH/0.8A COMMON CHOKE DWG. NO. ATS-680		
	RELEASE	10/15/2003	RDY	KEVIN	SUEDY		UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD		DATE 10/15/03		DRAW <i>Pair</i>
REVISIONS									