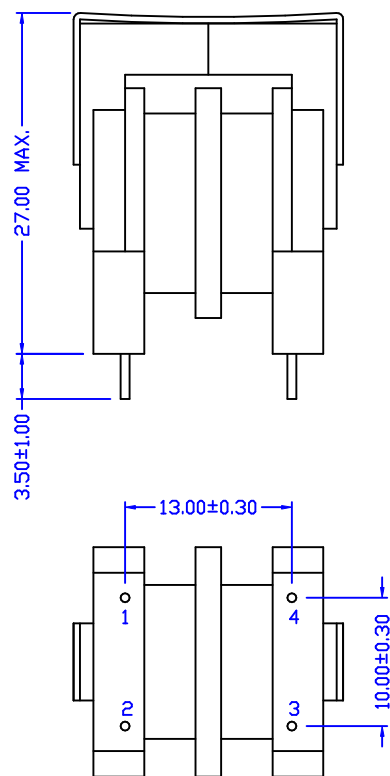


1. DCR : PIN 1-2 = 3-4 = 0.88 Ω HM MAX.
2. INDUCTANCE (@1KHz, 0.1Vrms) : PIN 1-2 = 20mH $\pm$ 25%
3. TURN RATIO (@60KHz, 1Vrms) : PIN 1-2 : 4-3 = 1 $\pm$ 1%
4. HI-POT (@2000VAC, 1mA, 1MIN) : PIN 1-4

						 Atech® Atech Technology Co., Ltd. TEL: 02-82794-6667 FAX: 02-82794-8804	TITLE 20mH/0.8A COMMON CHOKE DWG. NO.
							ATS-680A
	RELEASE	01/03/2004	PAIR	KEVIN	SUEDY	UNITS:	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M	
REVISIONS						DATE	SHEET 1 of 1 DRAW <i>Pair</i>
						02/03/04	