

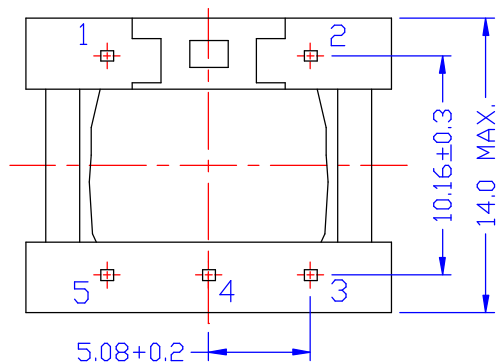


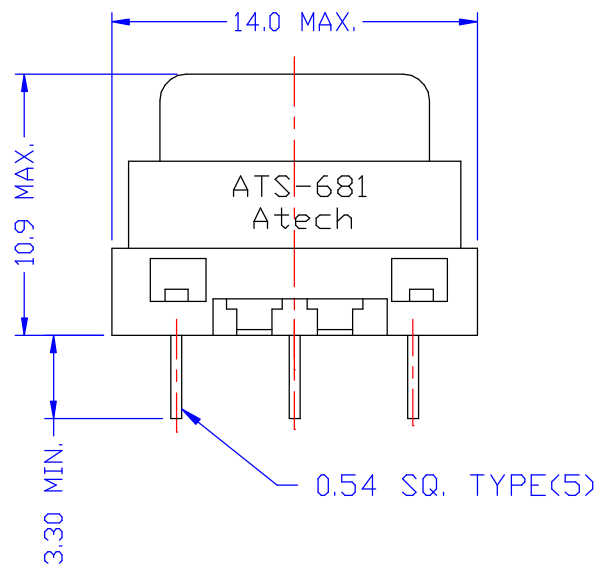

BOTTOM VIEW

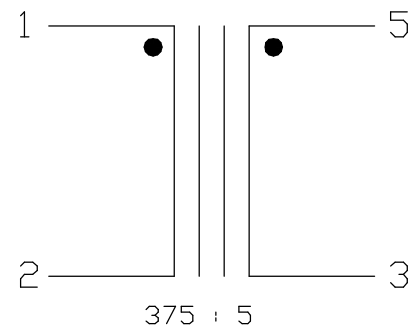

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 3-5 = 0.36 OHM MAX. PIN 1-2 = 15.5 OHM MAX.
2. INDUCTANCE : (@300HZ, 1Vrms) 1-2 = 0.35 MIN.
3. INSERTION LOSS : (@1KHZ, 0dBm 3-5 W/H 5 OHM) 1-2 = 1.2dB MAX.
4. FREQ. RESP. : 300HZ = ± 0.5 dB
3.4KHZ = ± 0.3 dB
5. RETURN LOSS : (@375 OHM REF)
300HZ = 16 dB MIN.
1KHZ = 16 dB MIN.
3.4KHZ = 16 dB MIN.
6. TURN RATIO : (@10KHZ, 1Vrms) 1-2 : 5-3 = 8.66 ± 1%
7. INSULATION RESISTANCE : (@100VDC) = 500M OHM MIN.

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE 375 : 5 TRANSFORMER	
A	LABEL	03/02 /2004	BART	AL	SUEDY			DWG. NO. ATS-681	
	RELEASE	10/20 /2003	PAIR	KEVIN	SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>	
REVISIONS						10/20/03			