

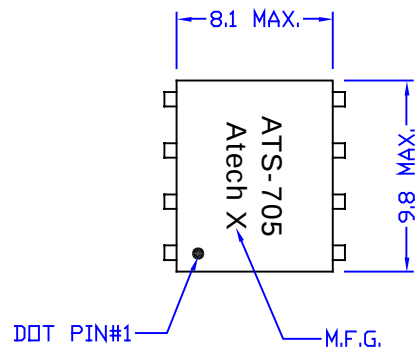


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 0.69 OHM MAX.
PIN 2-4 = 0.85 OHM MAX.
PIN 5-7 = 6.7 OHM MAX.
PIN 6-8 = 6.7 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1 Vrms) :
PIN 1-4 (2-3 SHORT) = 750uH ± 7%.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 5-7, 6-8 SHORT) = 10.5uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-8 (2-3, 6-7 SHORT) = 20 pF MAX.
- THD (@25KHZ, 5Vrms) :
PIN 1-4 (2-3, 6-7 SHORT, 8-5 W/H 110.8 OHM) = -70 dB MAX.
- TURN RATIO (@10KHZ, 0.1Vrms) :
PIN 1-4 : 8-5 (2-3, 6-7 SHORT) = 0.95 ± 1%.
- HI-POT (@1500VAC, 1mA, 2S) : P-S

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE ADSL LINE TRANSFORMER		
								DWG. NO. ATS-705		
A	SPEC.	06/29/2004	BART	MICHAEL	SUEDY	UNITS: M/M		SAFETY	SHEET 1 OF 1	
	RELEASE	05/18/2004	PAIR	SUEDY	SUEDY	DATE				DRAW <i>Pair</i>
NO	DESCRIPTION	DATE	BY	CHK	APPD	05/18/04				
REVISIONS										