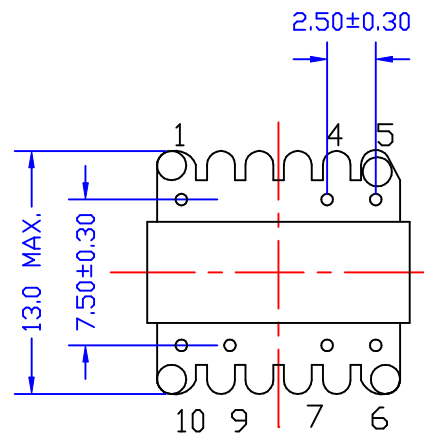
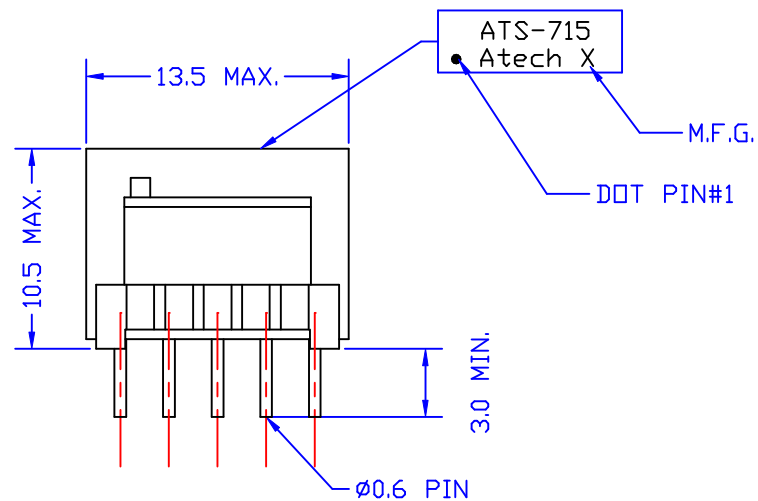


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-5 = 50 Ω HM $\pm 20\%$.
PIN 6-10 = 38 Ω HM $\pm 20\%$.
- INDUCTANCE (@1KHZ, 0.25 Vrms) :
PIN 1-5 = 316 mH $\pm 25\%$.
PIN 6-10 = 316 mH $\pm 25\%$.
- IMPEDANCE (@1KHZ, 0.25 Vrms, 6-10 W/H 600 Ω HM LOAD) :
PIN 1-5 = 600 Ω HM $\pm 20\%$.
- TURN RATIO (@1KHZ, 0.25Vrms) :
PIN 1-5:6-10 = 1 $\pm 1\%$.
- HI-POT (@250VAC, 5mA, 1MIN) :
PRI-SEC.
PRI-CORE.
SEC-CORE.

						Atech® Atech Technology Co.. Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE 600: 600 TRANSFORMER	
B	MOVE RAISED	12/16/2005	BART	MICHAEL	SUEDY		DWG. NO. ATS-715	
A	ERASE PIN 2,3	10/28/2005	BART	MICHAEL	SUEDY			
	RELEASE	10/21/2004	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 of 1
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE 10/21/04		DRAW <i>Pair</i>
REVISIONS								