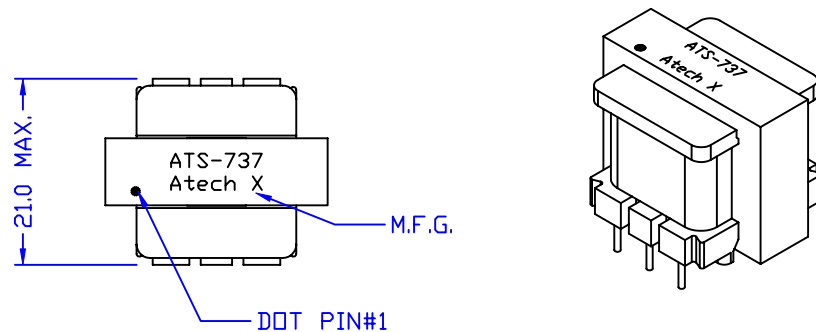


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 110 OHM $\pm 20\%$.
PIN 4-6 = 240 OHM $\pm 10\%$.
- IMPEDANCE
(@1KHZ, 1Vrms, 40mADC, 4-6 W/H 600 OHM) :
PIN 1-3 = 600 OHM $\pm 10\%$.
- INSERTION LOSS
(@1KHZ, 2.2 dBm, W/H 40mADC) : 3 dB MAX.
- LINEARITY (W/H 40mADC) :
@200HZ = ± 1 dB MAX.
@5KHZ = ± 1 dB MAX.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-3 = 650 mH MIN.
- POLARITY :
PIN 1-4 INPHASE.
- HI-POT (@1500VAC, 1mA, 1MIN.) :
PRI-SEC, WINDING-CORE.

						Atech®		TITLE
						Atech Technology Co., Ltd.		TRANSFORMER
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
						UNITS:		ATS-737
						M/M		SHEET 1 OF 1
						DATE		DRAW
						02/25/05		Pair
REVISIONS								
A	SPEC.	04/01/2005	BART	MICHAEL	SUEDY			
	RELEASE	02/25/2005	BART	MICHAEL	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD			