



ATS-744
Atech

M.F.G.

DOT PIN#1

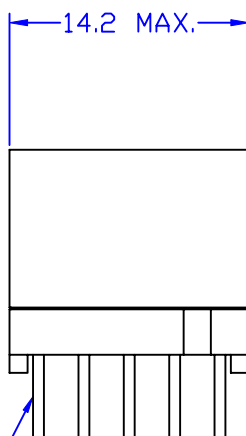


14.2 MAX.

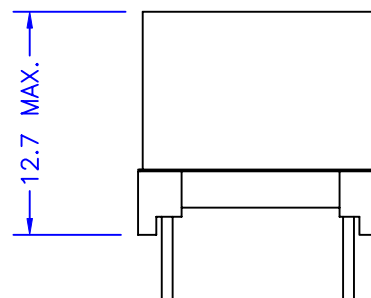

12.7 MAX.

2.8 MIN.

Ø0.6 PIN (TYP.)

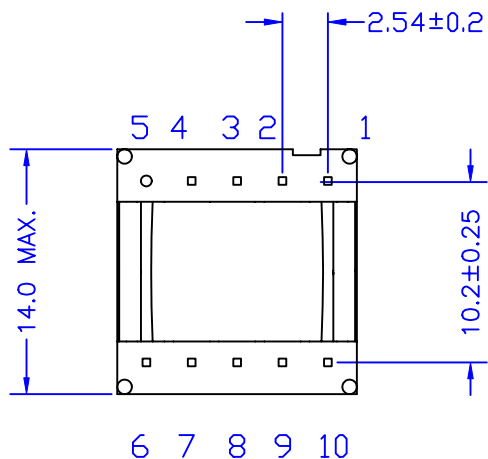


2.54±0.2

14.0 MAX.

10.2±0.25

6 7 8 9 10

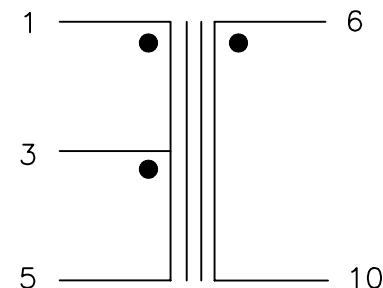

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-5 = PIN 6-10 = 15 OHM MAX.
2. INDUCTANCE:(@10KHZ, 0.1Vrms):
PIN 1-5 = 6 mH±10%
PIN 6-10 = 6 mH±10%
3. TURN RATIO (@10KHZ, 0.1Vrms) :
PIN 1-5 : PIN 6-10 = 1±2%
4. HI-POT (@1KVAC, 10mA, 2SEC.) : PRI - SEC

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-744	
	RELEASE	04/06/2005	BART	MICHAEL	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						04/06/05		