

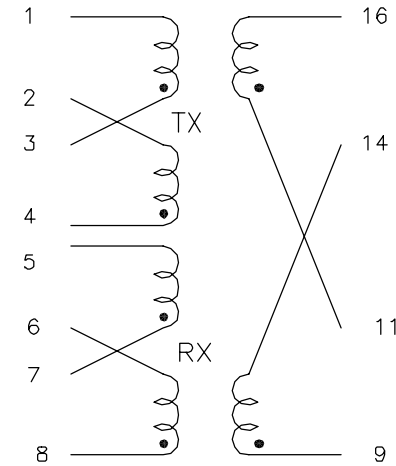
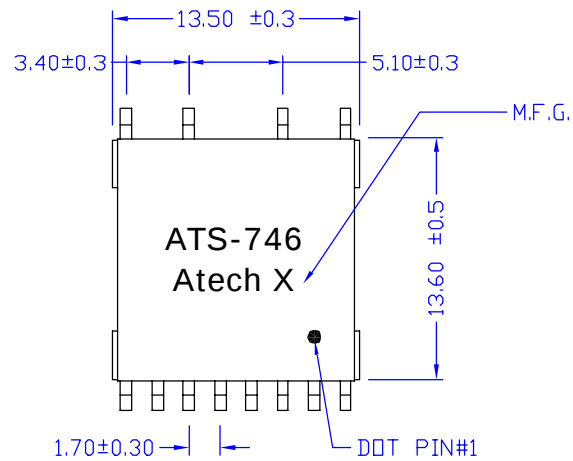


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHORT) = 0.26 OHM MAX.
PIN 5-8 (7-6 SHORT) = 0.56 OHM MAX.
PIN 9-16 (11-14 SHROT) = 0.8 OHM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 16-9 (11-14 SHORT) = 200uH ±6%.
- LEAKAGE INDUTCTANCE (0.1MHZ, 0.1mVrms) :
PIN 16-9 (1-4, 2-3, 11-14 SHORT) = 10uH MAX.
PIN 16-9 (5-8, 6-7, 11-14 SHORT) = 20uH MAX.
- TURNS RATIO (@1MHZ, 0.5Vrms) :
PIN 16-9:1-4 (2-3, 14-11 SHORT) = 3.8 ±3%.
PIN 16-9:5-8 (6-7, 14-11 SHORT) = 2 ±3%.
- HI-POT (@2000VAC, 1mA, 2S)
PIN 1-16 (2-3, 6-7, 11-14 SHORT)
- LEAD FREE.

						Atech®		TITLE	TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-746N
						TEL:022794-6667 FAX:022794-8004			
A	SPEC.	07/19/2005	BART	VINCENT	SUEDY	UNITS:	SAFETY		
	RELEASE	04/29/2005	BART	EEFLYS	SUEDY	M/M		SHEET 10F 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW	
REVISIONS						04/29/05		Pair	