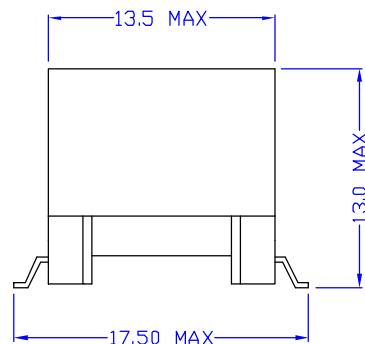
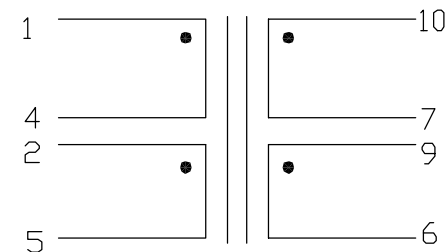
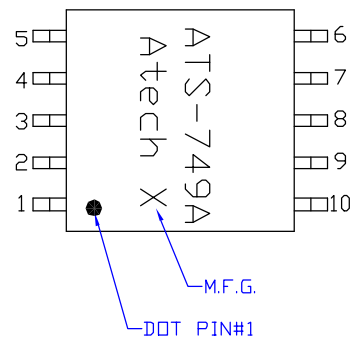


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 = 2-5 = 506 mΩHM MAX.
PIN 9-6 = 10-7 = 239 mΩHM MAX.
2. INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 410uH ± 5%
3. LEAKAGE INDUCTANCE (@300KHz, 0.1Vrms) :
PIN 1-5 (2-4, 6-7-9-10 SHORT) = 7.4uH MAX.
4. INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-10 (7-9, 2-4 SHORT) = 58 pF MAX..
5. TURN RATIO (@1MHz, 0.1Vrms) :
PIN 1-5 (2-4 SHRODT) : 10-6 (9-7 SHORT) = 2.19 ± 2%
6. HI-PDT (@1875VAC, 1mA, 2SEC) :
PRI-SEC

						Atech[®] Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-6004		TITLE	ADSL TRANSFORMER
								DWG. NO.	ATS-749A
	RELEASE	07/29/2005	BART	EEFLYS	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE			DRAW
						07/29/05		Pair	