
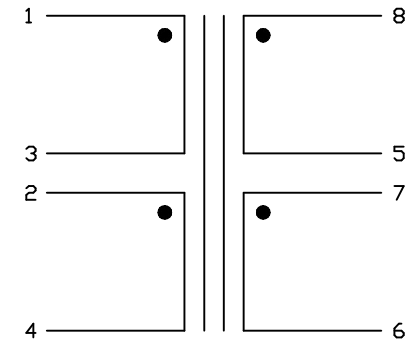

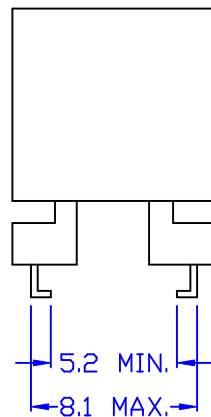
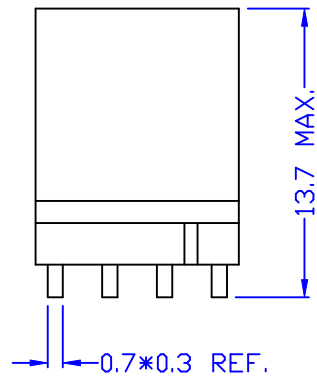


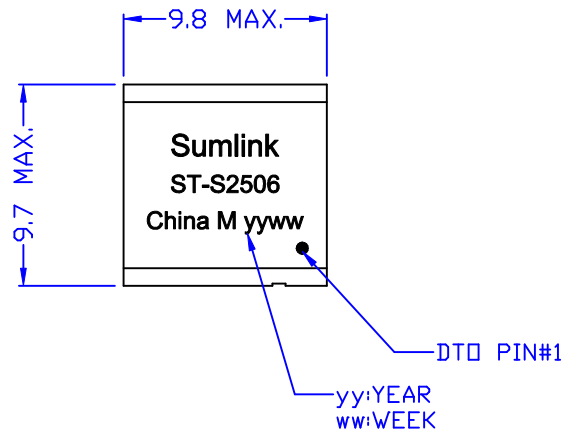

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 (2-3 SHROT) = 3 OHM MAX.
PIN 8-6 (5-7 SHROT) = 1 OHM MAX
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-4 (W/H 2-3 SHORT) = 1.2mH ± 10%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3 5-7 6-8 SHORT) = 6uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) :
PIN 1-8 (2-3 5-7 SHORT) = 50pF MAX.
- TURN RATIO (@1.5KHZ, 0.1Vrms) :
PIN 1-4 (2-3 SHORT) : 8-6 (5-7 SHORT) = 2.29 ± 5%
- THD (@40KHZ, 2Vrms) : -80 dB MIN.
- HI-POT (@1500VAC, 1mA, 2SEC) :
PIN 1-8 (2-3 5-7 SHORT)

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE TRANSFORMER	
A	MARKING	01/18 /2006	BART	AL	BART		DWG. NO. ATS-771	
	RELEASE	09/07 /2005	BART	ANDY	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						09/07/05		