
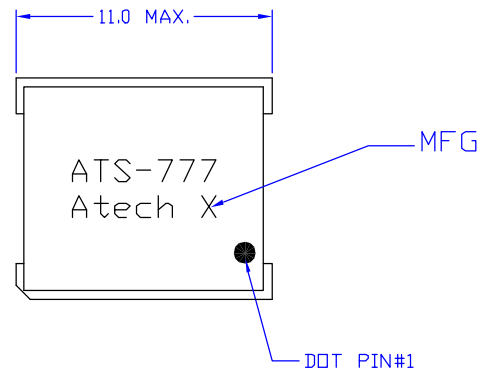


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 5.4 OHM MAX.
PIN 5-8 = 5.4 OHM MAX.
- INDUCTANCE (@0.1Vrms, 10KHz, ALC OFF) :
PIN 1-4 = 6.76 mH ±10%.
- LEAKAGE INDUCTANCE (@0.1Vrms, 100KHz) :
PIN 1-4 (5-8 SHORT) = 43 uH MAX.
- INTERWINDING CAP (@0.1Vrms, 100KHz) :
PIN 1-8 = 14.4 pF MAX.
- TURN RATIO (@0.1Vrms, 10KHz) :
PIN 1-4:5-8 = 1 ±1%.
- HI-POT (@1500VAC, 1mA, 2SEC) :
PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL: 02-2794-6667 FAX: 02-2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-777	
	RELEASE	10/28/2005	BART	LYS	SUEDY	UNITS: M/M	SAFETY		SHEET 10F 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						10/28/05			