



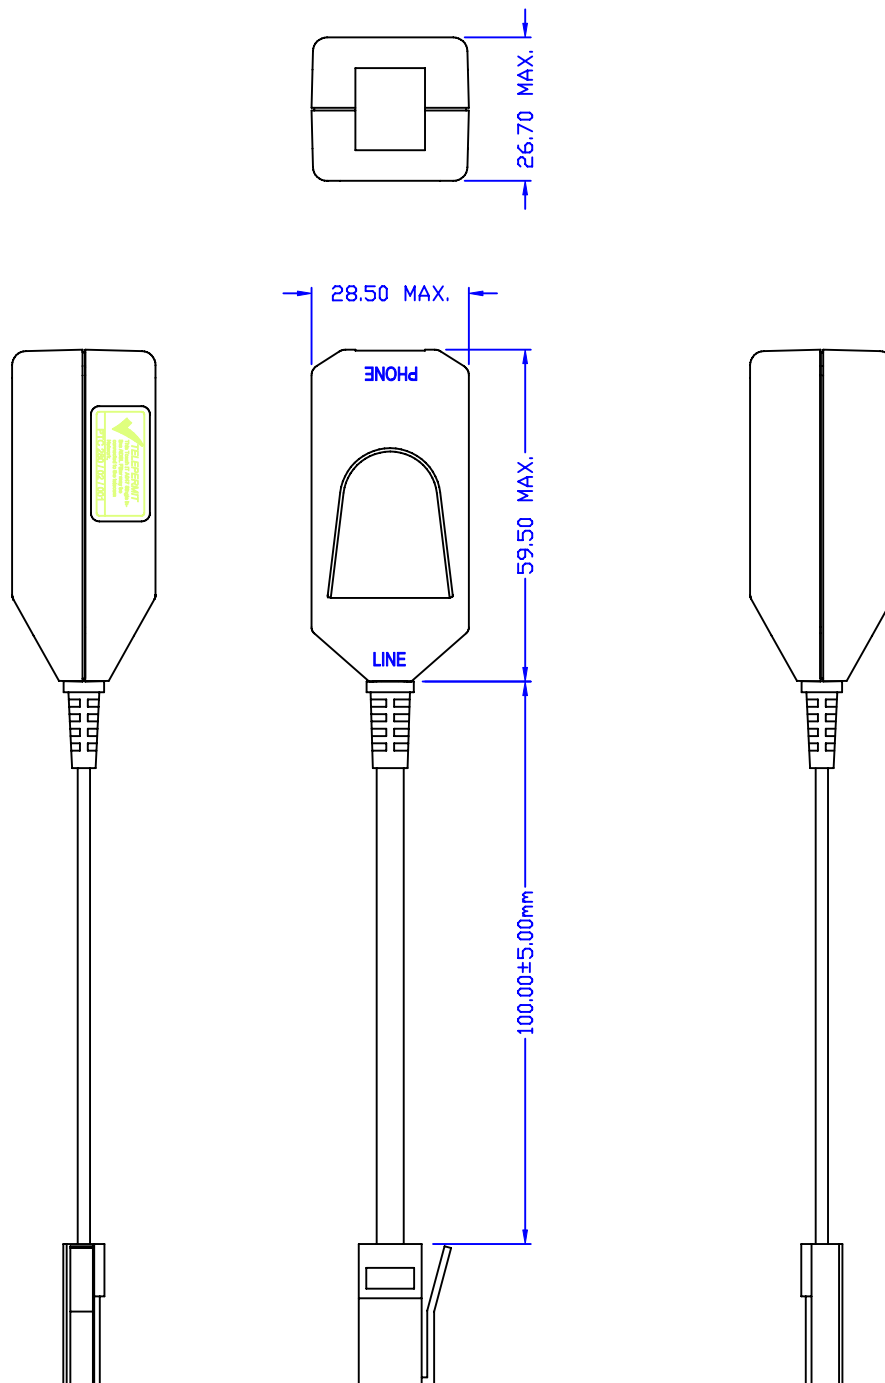

BT-PLUG

BT
JACK



ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS (@REF ZBT3, 300HZ-3.4KHZ) : 12dB MIN.
(@REF ZN, 300HZ-2.4KHZ) : 12dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
(@50KHZ) : 30dB MIN.
(@100KHZ) : 40dB MIN.
7. RoHS COMPLIANT

						Atech®		TITLE MICRO FILTER FOR UK
						Atech Technology Co. Ltd.		DWG. NO.
						TEL:02794-6667 FAX:02794-8004		ADSL005
RELEASE		01/18/2008	Pair	Michael	Eugene	UNITS:	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M	P/N:	DRAW
REVISIONS						01/18/08	CFA06000RA	Pair