
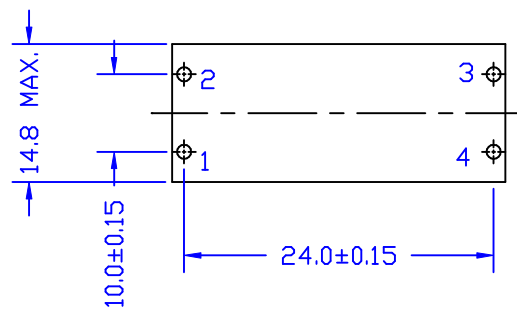
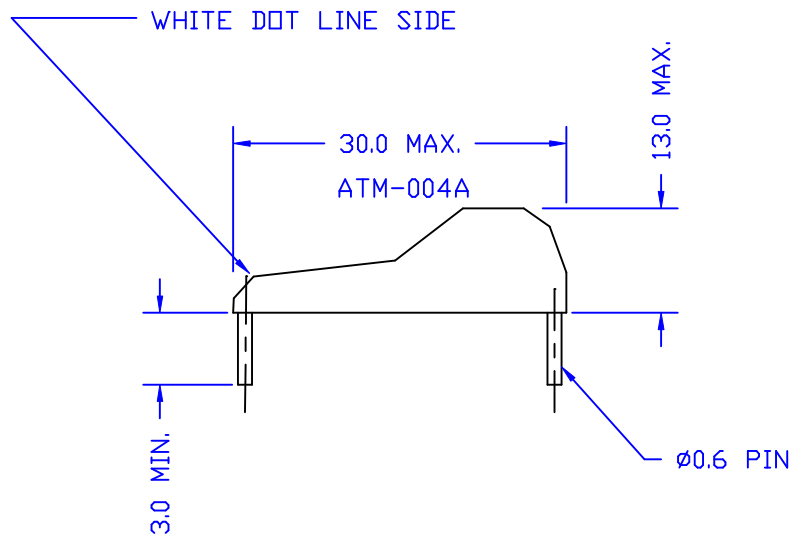


GRID 1 * 1

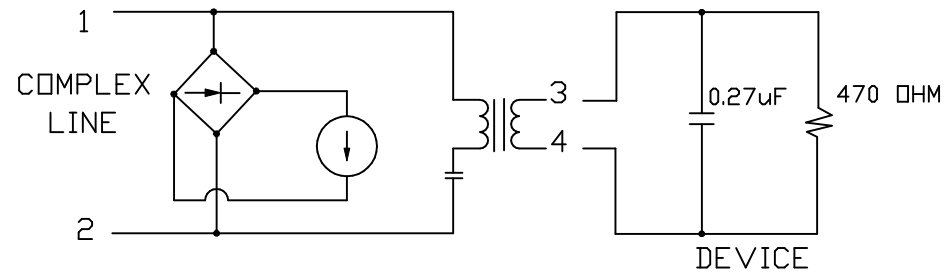

ELECTRICAL CHARACTERISTICS:

- DC. VOLTAGE : PIN 1-2(@54mADC) = 10V MIN.
PIN 1-2(@40mADC) = 6V MAX.
- D.C.R. : PIN 3-4 = 38 OHM +/- 10%
- INSERTION LOSS (@ 1KHZ,1Vrms, W/H 470 OHM // 0.27uF LOAD)
@30mADC = 1db MAX.
- FREQ. RESP.(300HZ TO 4KHZ) : @30mADC = 0.35db MAX.
- RETURN LOSS (REF. "(820 OHM // 115nF)" + 220 OHM W/H 30mADC):
@200HZ = 10db MIN. @500HZ = 15.5db MIN.
@2500HZ = 17.5db MIN. @4000HZ = 12db MIN.
- THD(@300HZ, W/H 30mADC) : -50db MAX.
- LONGITUDINAL BALANCE : 30db MIN. 200-4KHZ
- HI-POT (@3750V, 1mA, 1MINUTE) : LINE-DEVICE
- RoHS COMPLIANCE

						Atech®		TITLE COMPLEX COUPLING MODULE	
						Atech Technology Co., Ltd.		DWG. NO.	
						TEL:(02)2794-6667 FAX:(02)2794-8004		ATM-004AR	
RELEASE		03/21/2006	PAIR	LYS	SUEDY	UNITS: M/M		SAFETY	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	
REVISIONS						03/21/06		CMD241527A	
								SHEET 1 OF 1	
								DRAW Pair	