
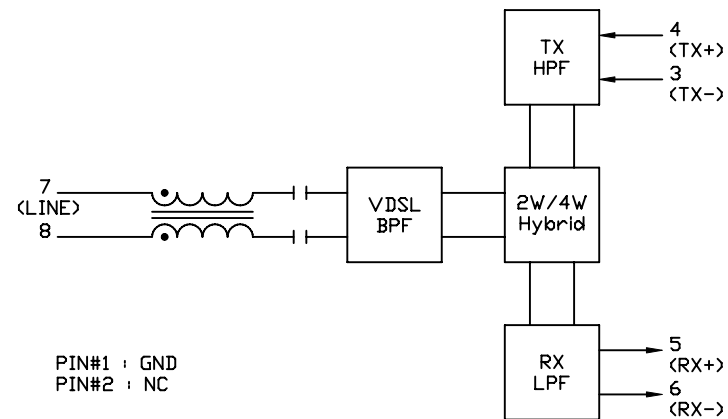
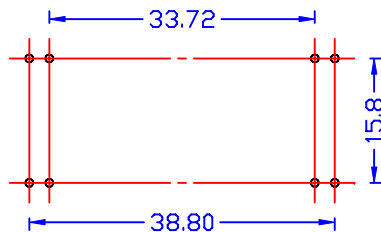

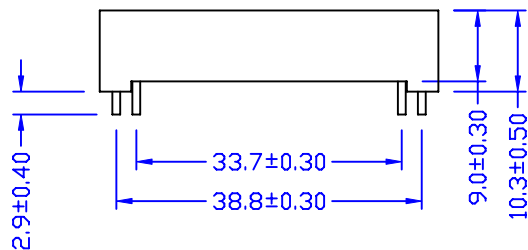


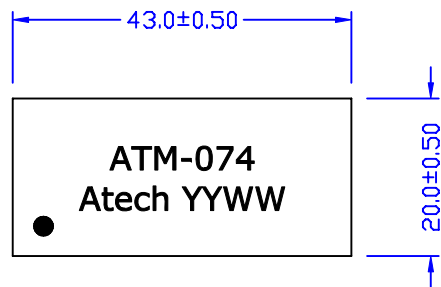

Description	Passband Frequency	Insertion Loss (Max)	Return Loss(Min)	Stopband Frequency	Attn. (Min)	Impedance
VDSL BPF	900KHZ TO 7.9MHZ	0.8 dB	10 dB	20KHZ TO 250KHZ	50 dB	100 ohms
RX LPF	900KHZ TO 3.3MHZ	0.8 dB	12 dB	4.0MHZ TO 7.9MHZ	50 dB	270 ohms
TX HPF	4.0MHZ TO 7.9MHZ	0.8 dB	10 dB	900KHZ TO 3.3MHZ	15 dB	40 ohms

						Atech® Atech Technology Co., Ltd. TEL:02794-6667 FAX:02794-8004	TITLE	VDSL CPE MODULE
							DWG. NO.	ATM-074
A	DIM.	05/10 /2002	DOLLY	PAIR	SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	12/19 /2001	DOLLY	AL	SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						12/19/01	CMV432042A	<i>Pair</i>