
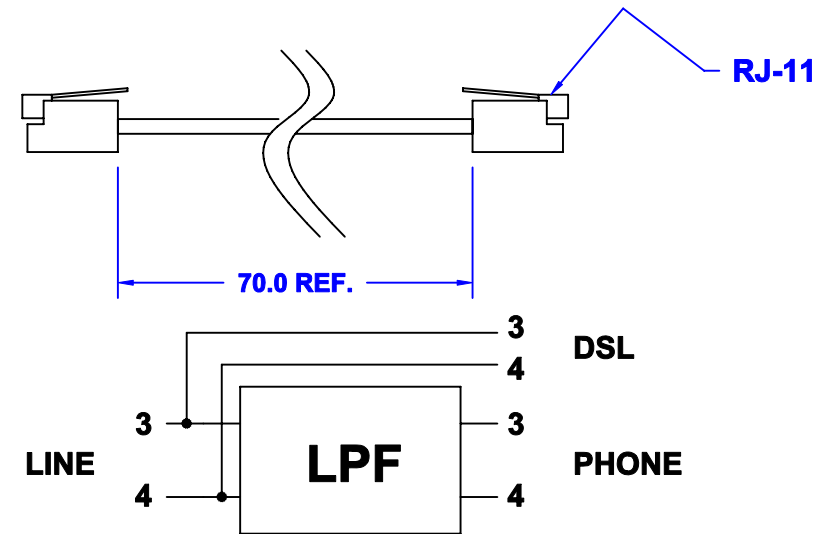
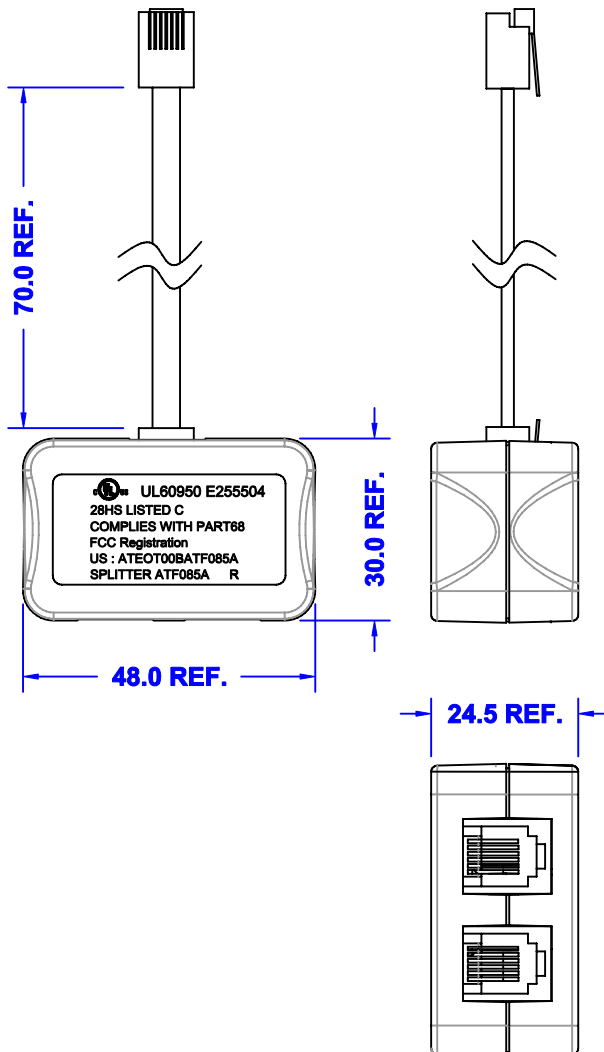




ELECTRICAL CHARACTERISTICS : (MEETS/EXCEEDS T1E1.4 STANDARD)

1. EACH LINE : 10 OHM MAX.
2. OFF HOOK INSERTION LOSS (@1KHZ) : SINGLE FILTER : 0.5dB MAX.
WITH 5 FILTERS : 1dB MAX.
3. OFF HOOK INSERTION LOSS DISTORTION
(@200HZ~3.4KHZ) : SINGLE FILTER : 0.5dB~-1dB
WITH 5 FILTERS : 2.5dB~-1.5dB
(@3.4KHZ~4KHZ) : SINGLE FILTER : 1dB~-1.5dB
WITH 5 FILTERS : 4dB~-2dB
4. RETURN LOSS : PHONE PORT (@SRLL) = 13dB MIN.
(@ERL) = 9dB MIN.
(@SRLH) = 3dB MIN.
LINE PORT (@SRLL) = 12dB MIN.
(@ERL) = 10dB MIN.
(@SRLH) = 5dB MIN.
5. LONGITUDINAL BALANCE (@200HZ~1KHZ) : 50dB MIN.
(@1KHZ~3KHZ) : 50dB MIN.
6. ADSL FREQUENCY REJECTION (@25KHZ~12MHZ) : 21dB MIN.
7. RoHS Compliant

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6867 FAX:(02)2794-8004	TITLE	ADSL SPLITTER
							DWG. NO.	ATF085AR
A	MARKING ADD R	07/28 /2006	PAIR	AL	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	06/08 /2006	PAIR	MICHAEL	EUGENE	M/M		
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						06/08/06	CSA06000NA	Pair

SHEET 1 OF 1