
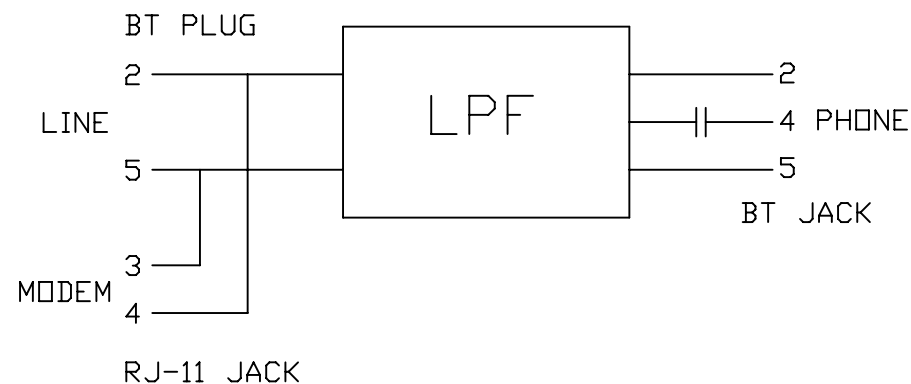
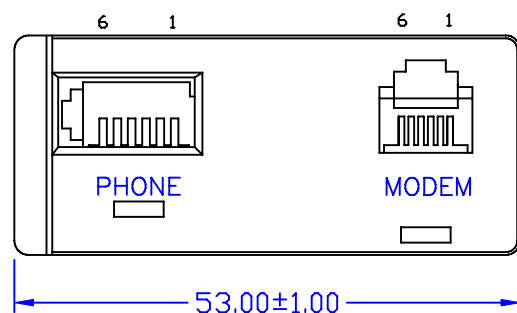


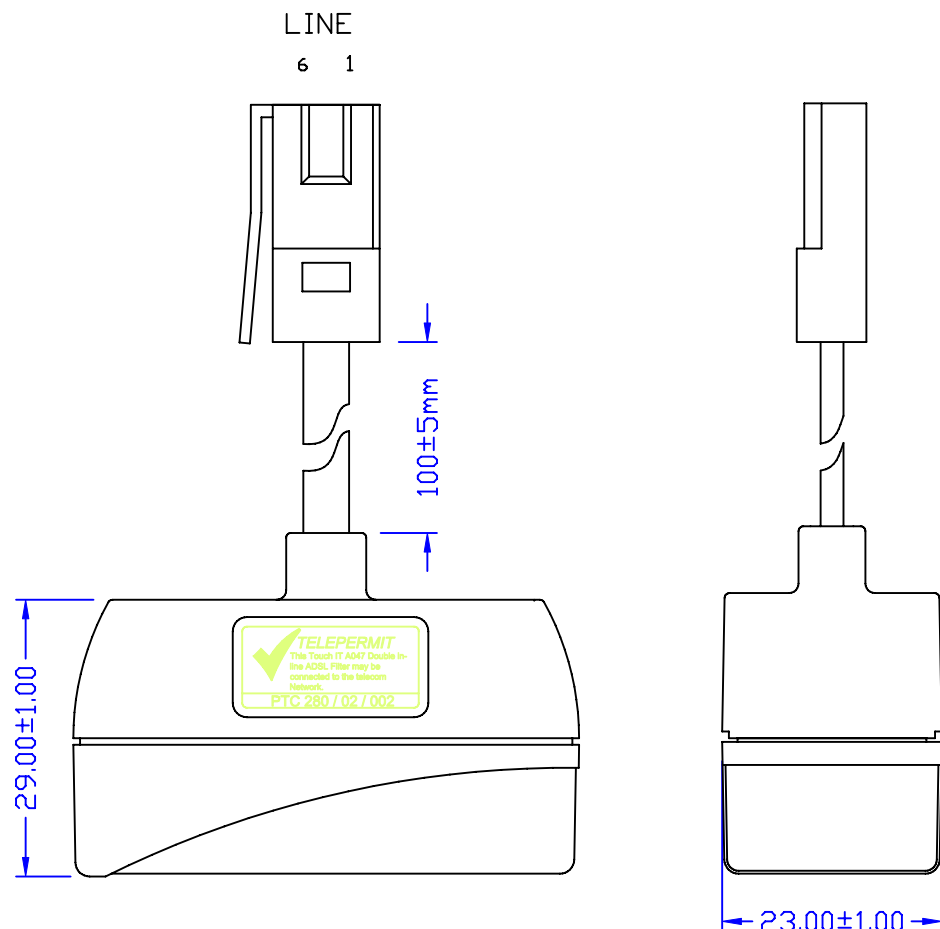

ELECTRICAL CHARACTERISTICS :

1. DCR EACH LINE : 50 OHM MAX.
2. INSERTION LOSS (@1KHZ, 1Vrms) : 1dB MAX.
3. INSERTION LOSS DISTORTION : (@200HZ-4KHZ) : ± 1 dB
4. RETURN LOSS (@REF ZBT3, 300HZ-3.4KHZ) : 12dB MIN.
(@REF ZN, 300HZ-3.4KHZ) : 12dB MIN.
5. LONGITUDINAL BALANCE (@200HZ-3KHZ) : 54dB MIN.
6. ATTENUATION (@25KHZ) : 18dB MIN.
(@50KHZ) : 30dB MIN.
(@100KHZ) : 40dB MIN.
7. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004	TITLE MICRO FILTER FOR UK	
							DWG. NO. ADSL001	
	RELEASE	01/18 /2008	Pair	Michael	Eugene		UNITS: M/M	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	SHEET 1 OF 1
REVISIONS						01/18/08	CSA060011A	DRAW <i>Pair</i>