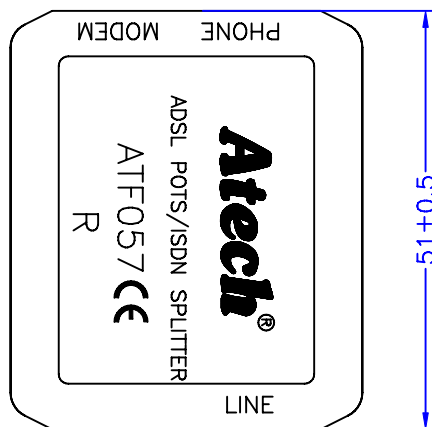
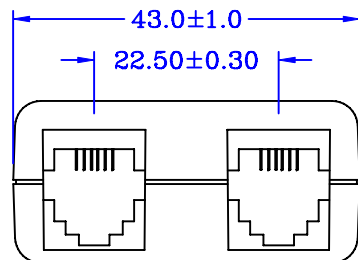


ELECTRICAL CHARACTERISTICS :

- DCR loop : 12.5 OHM MAX.
- FREQ. PULSE METERING
INSERTION LOSS :
(@12 KHZ) = 3 dB MAX.
(@16 KHZ) = 3 dB MAX.
- POTS : (600 OHMS OR 270 OHMS +(750 OHMS//150nF)
INSERTION LOSS :
(@ 200 HZ) = 1 dB MAX.
(@ 1 KHZ) = 1 dB MAX.
(@ 3.6 KHZ) = 1 dB MAX.
- RETURN LOSS (REF.Zr)
(@ 300 HZ) = 15 dB MIN.
(@ 1.6 KHZ) = 15 dB MIN.
(@ 3.4 KHZ) = 12 dB MIN.
- ISDN : (135/150 OHM)
INSERTION LOSS :
(@ 1 KHZ) = 0.8 dB MAX.
(@ 40 KHZ) = 0.8 dB MAX.
(@ 80 KHZ) = 2 dB MAX.
RETURN LOSS :
(@ 4 KHZ) = 16 dB MIN.
(@ 40 KHZ) = 16 dB MIN.
(@ 80 KHZ) = 14 dB MIN.
- ATTENATION
(@ 150 KHZ) = 65 dB MIN.
(@ 1.1 MHZ) = 65 dB MIN.
(@ 2.2 MHZ) = 55 dB MIN.
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-8887 FAX:(02)2794-8004	TITLE ADSL POTS/ISDN SPLITTER	
							DWG. NO.	ATF057R1
	RELEASE	07/28/2006	PAIR	SIMON	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N :	DRAW
REVISIONS						07/28/06	CSA260003A	<i>Pair</i>