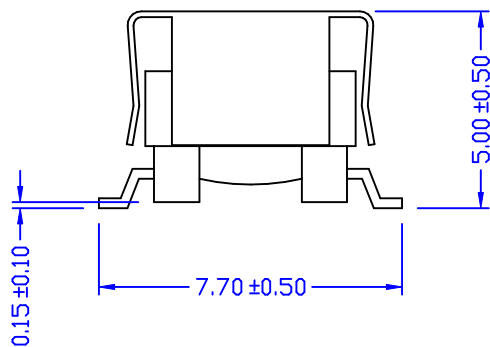
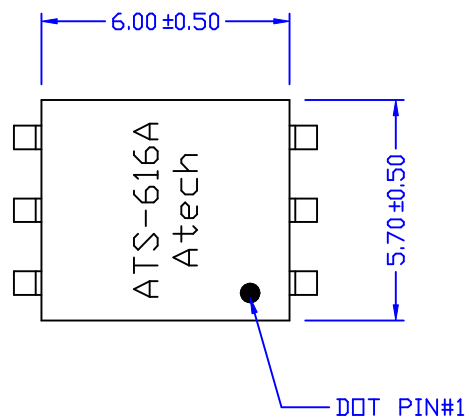


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 4-6 = 4.3 Ω MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-3 = 4-6 = 240 μ H $\pm 5\%$.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-3 (4-6 SHORT) = 1.3 μ H MAX.
- INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-4 = 350 pF MAX.
- TURN RATIO (@700KHz, 0.1Vrms) :
PIN 1-3:4-6 = 1 $\pm 1\%$
- HI-POT (@250VDC, 0.5mA, 2SEC) :
PIN 1-6
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004		TITLE		INDUCTOR	
								DWG. NO.		ATS-616AR	
	RELEASE	02/20/2006	PAIR	LYS	SUEDY	UNITS: M/M		SAFETY		SHEET 1 OF 1	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:		DRAW	
REVISIONS						02/20/06		CTA005001A		Pair	