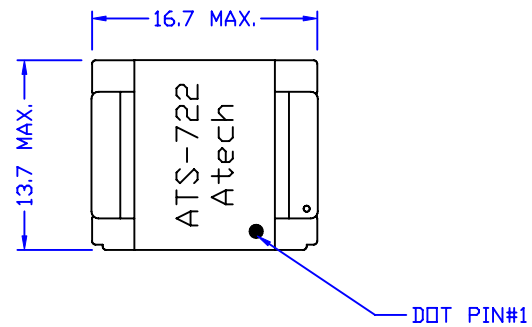


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-10 = 0.816 Ω HM MAX.
PIN 2-9 = 0.816 Ω HM MAX.
PIN 4-7 = 1.063 Ω HM MAX.
PIN 5-6 = 1.063 Ω HM MAX.
- INDUCTANCE (@1KHZ, 0.1Vrms) :
PIN 1-10 = 84.5 μ H $\pm 8\%$.
PIN 2-9 = 84.5 μ H $\pm 8\%$.
PIN 4-7 = 118.6 μ H $+10\%/-3\%$.
PIN 5-6 = 118.6 μ H $+10\%/-3\%$.
- CAPACITANCE (@1KHZ, 0.1Vrms) :
PIN 9-10 = 185 pF $\pm 30\%$.
PIN 6-7 = 220 pF $\pm 30\%$.
- HI-POT (@0.5KVAC, 1mA, 2S) :
PIN 1-2, 4-5

						Atech®		TITLE
B	L $\pm 8\%$	07/14/2006	PAIR	MICHAEL	EUGENE	Atech Technology Co. Ltd.		TRANSFORMER
A	CAP $\pm 30\%$	06/09/2006	PAIR	MICHAEL	EUGENE	TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
	RELEASE	11/23/2004	BART	MICHAEL	SUEDY	UNITS:	SAFETY	ATS-722
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1
REVISIONS						DATE	P/N:	DRAW
						11/23/04	CTA013002A	Pair