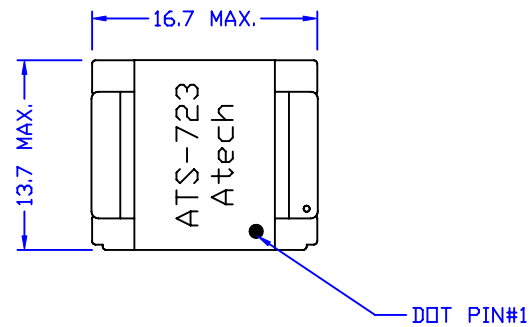


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-10 = 0.945 Ω M MAX.
PIN 2-9 = 0.945 Ω M MAX.
PIN 4-7 = 1.065 Ω M MAX.
PIN 5-6 = 1.065 Ω M MAX.
- INDUCTANCE (@1KHZ, 0.1Vrms) :
PIN 1-10 = 112.5 μ H $\pm$ 8%.
PIN 2-9 = 112.5 μ H $\pm$ 8%.
PIN 4-7 = 118.6 μ H +10%/-3%.
PIN 5-6 = 118.6 μ H +10%/-3%.
- CAPACITANCE (@1KHZ, 0.1Vrms) :
PIN 9-10 = 220 pF $\pm$ 30%.
PIN 6-7 = 240 pF $\pm$ 30%.
- HI-POT (@0.5KVAC, 1mA, 2S) :
PIN 1-2, 4-5

						Atech®		TITLE
B	L $\pm$ 8%	07/14/2006	PAIR	MICHAEL	EUGENE	Atech Technology Co. Ltd.		TRANSFORMER
A	CAP = $\pm$ 30%	06/09/2006	PAIR	MICHAEL	EUGENE	TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
	RELEASE	11/23/2004	BART	MICHAEL	SUEDY	UNITS:	SAFETY	ATS-723
NO	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1
REVISIONS						DATE	P/N:	DRAW
						11/23/04	CTA013003A	Pair