
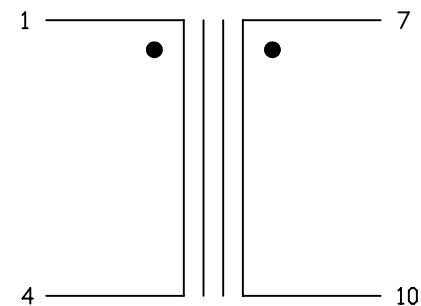
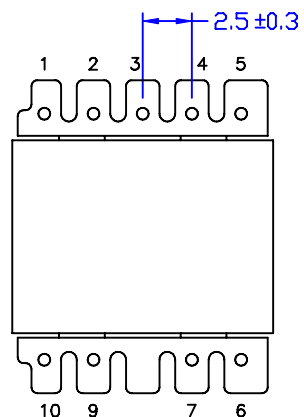
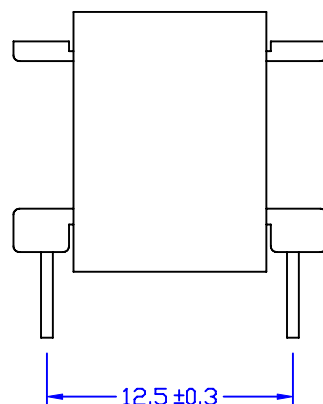
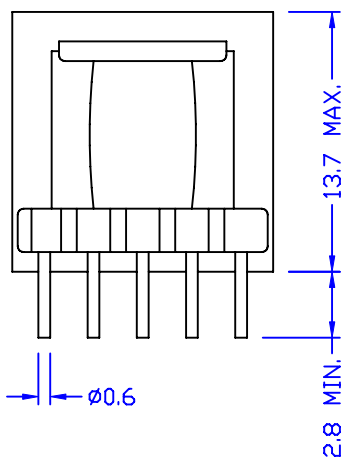


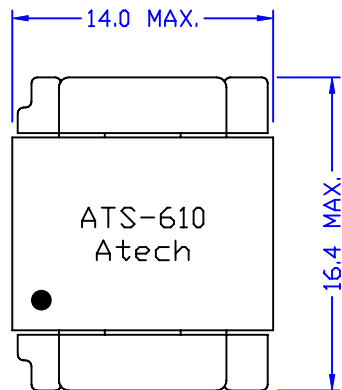

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4 = 7-10 = 7.81 OHM $\pm 12\%$
- INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-10 (4-7 SHORT) = 44mH $\pm 5\%$
(@100mADC) : PIN 1-10 (4-7 SHORT) = 39.6mH MIN.
- INDUCTANCE BAL. (@1KHZ, 1Vrms) : PIN 1-4 : PIN 7-10 = 1 $\pm 1\%$
- TURN RATIO (@50KHZ, 1Vrms) : PIN 1-4 : PIN 7-10 = 1 $\pm 2\%$
- HI-POT (@500VAC, 1mA, 2SEC) : PIN 1-10

						Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE INDUCTOR FOR SPLITTER	
								DWG. NO. ATS-610	
	RELEASE	05/06/2002	DOLLY	JEFF	SUEDY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						05/06/02		P/N: CTA013009A DRAW <i>Pair</i>	