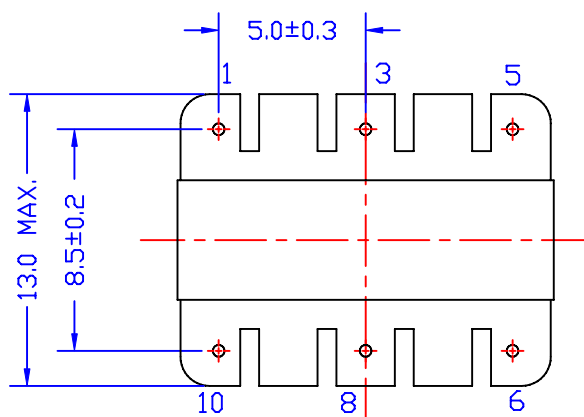


1. DCR : PIN 1-3 = 55 mOHM MAX., PIN 3-5 = 365 mOHM MAX.
PIN 6-8 = 405 mOHM MAX. PIN 8-10 = 56 mOHM MAX.
2. INDUCTANCE (@10KHz, 0.1Vrms) : PIN 1-3= 8-10 = 1.58uH $\pm$ 10%
PIN 3-5 = PIN 6-8 = 118.3 uH $\pm$ 8%
3. INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 1-6 = 35pF MAX.
4. TURN RATIO (@500KHZ, 0.1Vrms) : 1-5 : 6-10 = 1 $\pm$ 1%
3-5 : 6-8 = 1 $\pm$ 1%
5. HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC
6. RoHS COMPLIANT

					Atech® Atech Technology Co., Ltd. TEL:0202794-6667 FAX:0202794-8004	TITLE TRANSFORMER			
B	TOLERANCE	03/24 2008	PAIR	MICHAEL		EUGENE	DWG. NO. ATS-807R		
A	CW/W	1/28 2007	PAIR	MICHAEL		EUGENE			
	RELEASE	05/29 2006	PAIR	AL		EUGENE			
NO.	DESCRIPTION	DATE	BY	CHK		APPD			
REVISIONS						UNITS: M/M		SHEET 1 OF 1	
						DATE 05/29/06		P/N: CTA013012A	
								DRAW <i>Pair</i>	