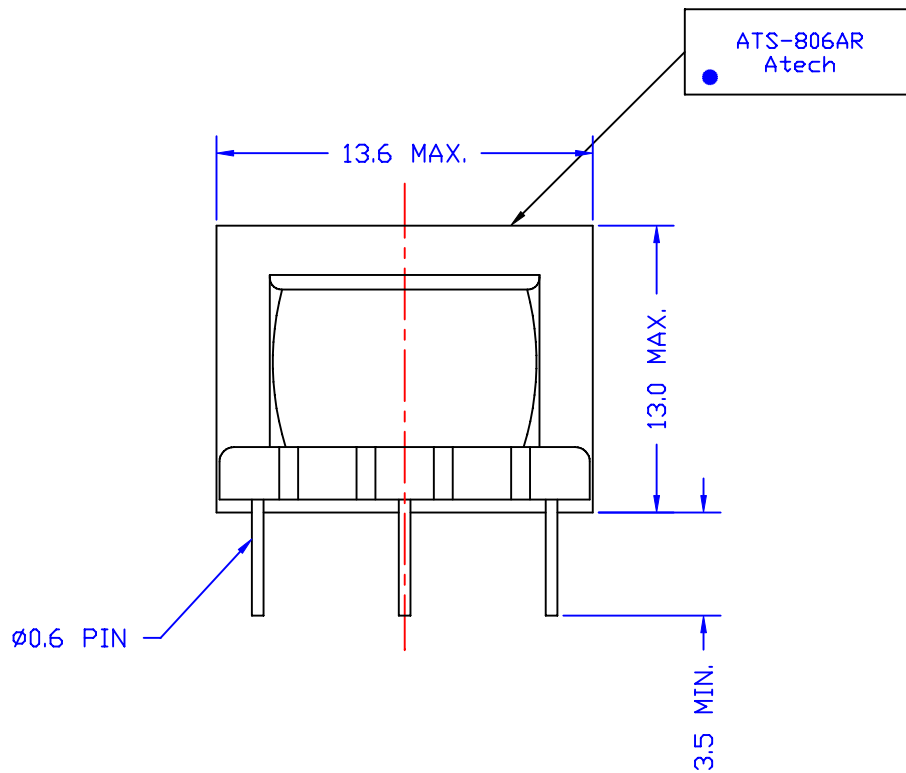


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 420 mOHM MAX., PIN 1-5 = 380 mOHM MAX.
PIN 6-10 = 330 mOHM MAX. PIN 8-10 = 370mOHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 1-3= 8-10 = 127uH $\pm$ 6%
PIN 1-5 = PIN 6-10 = 92.5 uH $\pm$ 6%
- INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 5-6 = 36pF MAX.
- TURN RATIO (@500KHZ, 0.1Vrms) : 1-5 : 6-10 = 1 $\pm$ 2%
1-3 : 8-10 = 1 $\pm$ 2%
- HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-806AR	
	RELEASE	07/10/2007	PAIR	MICHAEL	EUGENE	UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N	DRAW
REVISIONS						07/10/07		CTA013016A	<i>Pair</i>