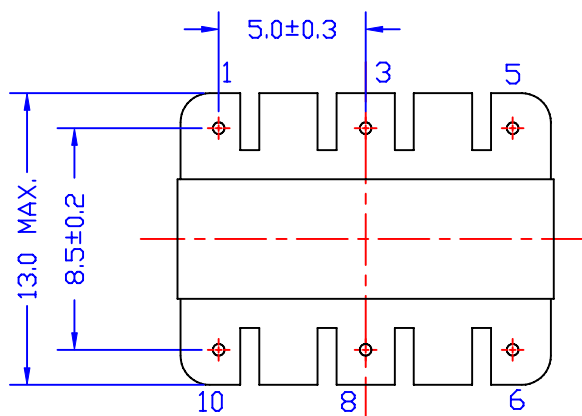
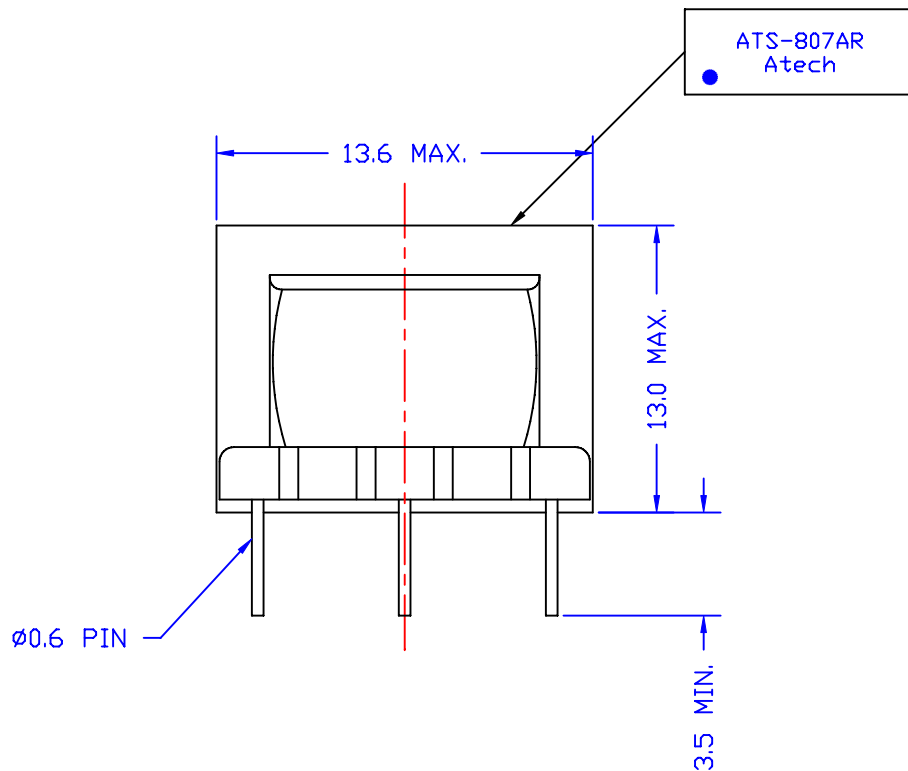


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = 420 mOHM MAX., PIN 1-5 = 410 mOHM MAX.
PIN 6-10 = 460 mOHM MAX. PIN 8-10 = 480 mOHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 1-3= 8-10 = 147uH $\pm$ 6%
PIN 1-5 = PIN 6-10 = 127 uH $\pm$ 6%
- INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 5-6 = 31pF MAX.
- TURN RATIO (@500KHZ, 0.1Vrms) : 1-5 : 6-10 = 1 $\pm$ 1%
1-3 : 8-10 = 1 $\pm$ 2%
- HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE TRANSFORMER
								DWG. NO. ATS-807AR
	RELEASE	07/09/2007	PAIR	MICHAEL	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE 07/09/07	P/N: CTA013017A	DRAW <i>Pair</i>
REVISIONS								