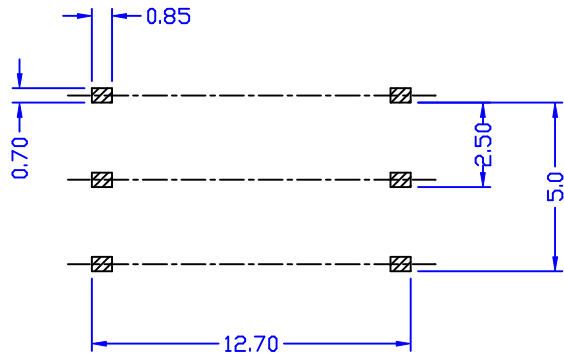
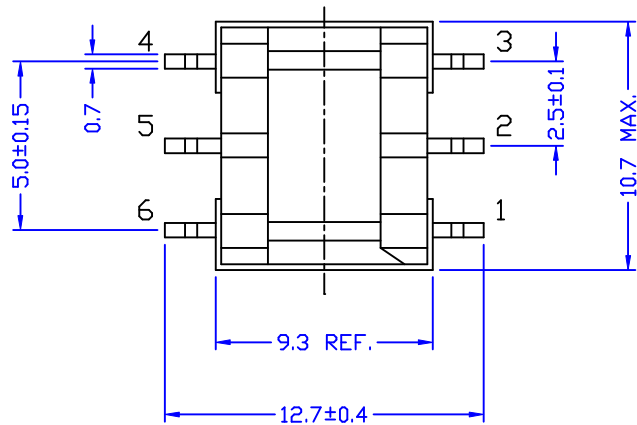
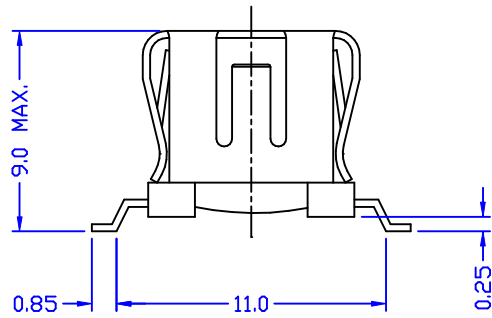
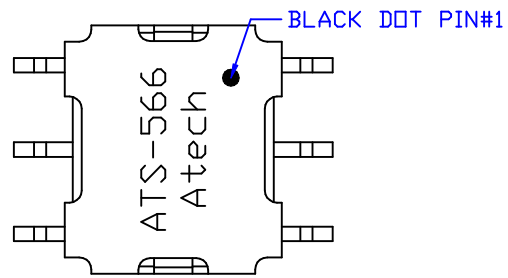


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-6 = 9.43 OHM MAX.
PIN 3-4 = 11.85 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-6 = 3.5mH ± 9%
PIN 1-6 (W/H 25mADC) = 3.5mH ± 9%
3. LEAKAGE INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-6 (W/H 3-4 SHORT) = 120uH MAX.
4. INTERWINDING CAP (@100KHZ, 0.1Vrms) : PIN 1-3 = 20pF MAX.
5. TURN RATIO (@5KHZ, 1Vrms) : PIN 1-6 : PIN 3-4 = 1 ± 1%
6. SRF (W/H 3-6 SHORT) : PIN 1-4 = 420KHZ MIN.
7. HI-POT (@600VAC, 500uA, 1SEC) : PIN 1-3

						Atech®		TITLE MICRODATA
						Atech Technology Co., Ltd.		FILTER INDUCTOR
						TEL:02)2794-6667 FAX:02)2794-8004		DWG. NO.
								ATS-566
RELEASE	10/26/2001	DOLLY	CPLIU	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		
REVISIONS						DATE	P/N	DRAW
						10/26/01	CTA407002A	Pair