

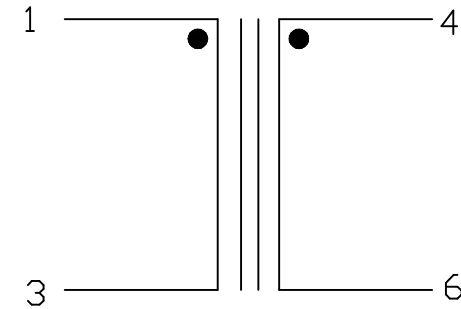


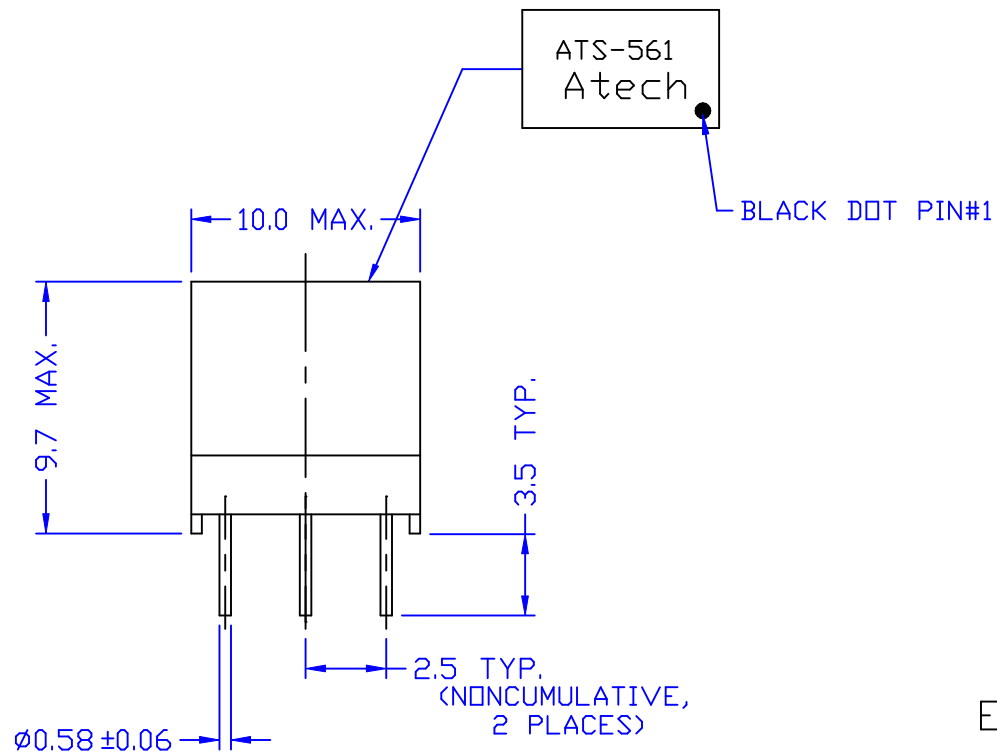

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-1 = 6-4 = 0.4 Ω HM MAX.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 360uH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 324uH MIN.
- TURN RATIO (@900KHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 3%
- HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-4

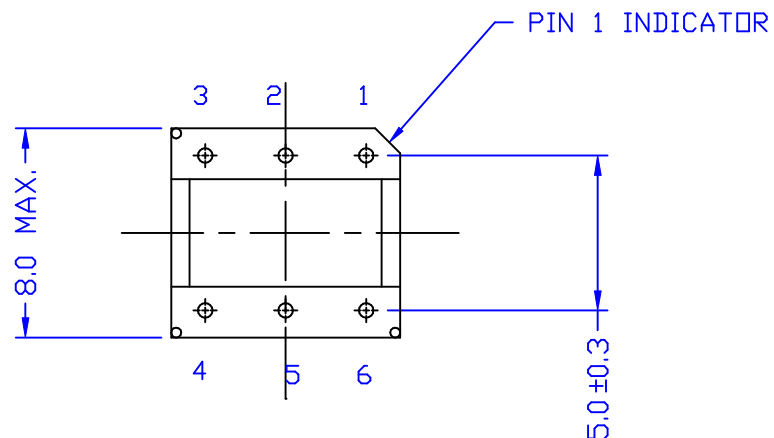

						Atech®		TITLE: INDUCTOR FOR ISDN/POTS SPLITTER	
B	ERASE FM-EP7-02	01/31/2005	BART	ANDY	SUEDY	Atech Technology Co., Ltd.		DWG. NO.	ATS-561
A	TURN RATIO	11/15/2002	DOLLY	KEVIN	SUEDY	TEL: (02) 2794-6667 FAX: (02) 2794-8004			
	RELEASE	10/06/2001	DOLLY	JEFF	SUEDY	UNITS:	SAFETY		SHEET OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	P/N	DRAW	
						10/06/01	CTA40700AA	Pair	