
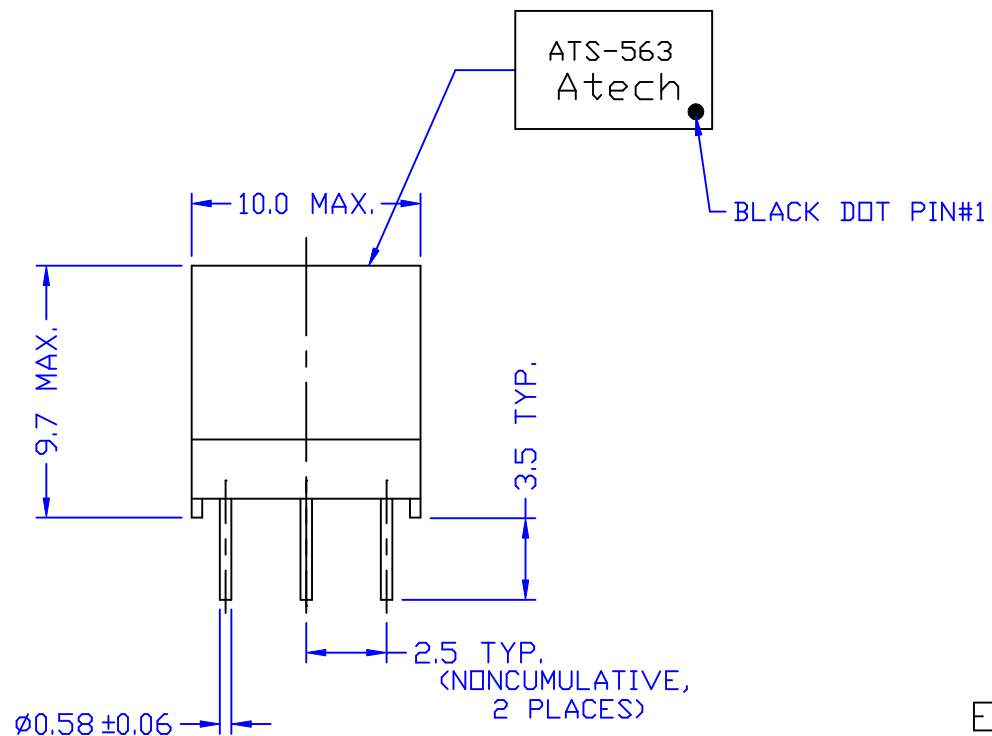


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 3-1 = 6-4 = 0.37 OHM MAX.
- INDUCTANCE (@1KHZ, 1Vrms) :
PIN 1-6 (3-4 SHORT) = 313.6uH $\pm$ 5%
(@100mADC) : PIN 1-6 (3-4 SHORT) = 282uH MIN.
- TURN RATIO (@1MHZ, 1Vrms) : PIN 1-3 : 4-6 = 1 $\pm$ 3%
- HI-POT (@500VDC, 1mA, 2SEC) : PIN 1-4

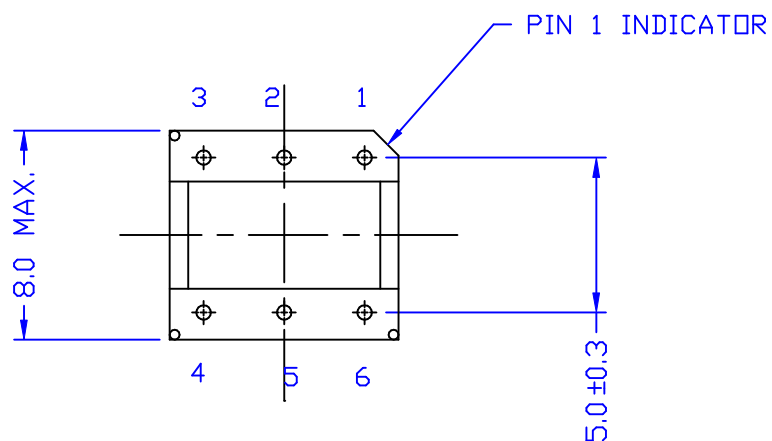

					Atech® Atech Technology Co., Ltd. TEL:0212794-6667 FAX:0212794-8004		TITLE:INDUCTOR FOR ISDN/POTS SPLITTER		
B	REDRAW	11/24/2002	BART	LYS			SUEDY	DWG. NO.	
A	TURN RATIO	11/15/2002	DOLLY	KEVIN			SUEDY	ATS-563	
	RELEASE	10/06/2001	DOLLY	JEFF	SUEDY	UNITS:	SAFETY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M	SHEET OF 1		
REVISIONS						DATE	P/N	DRAW	
						10/06/01	CTA40700CA	Pair	