
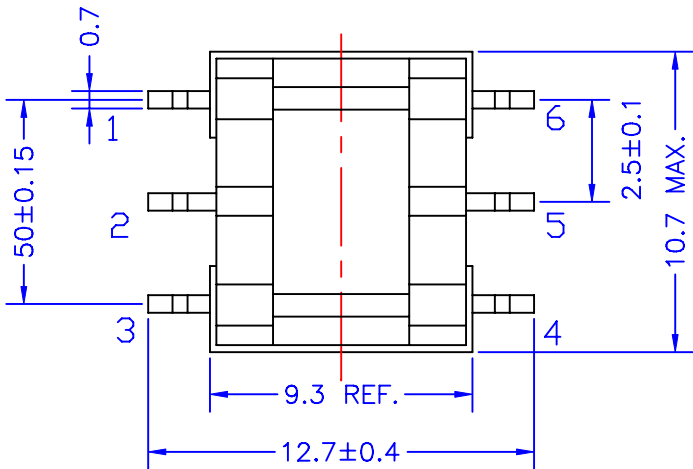
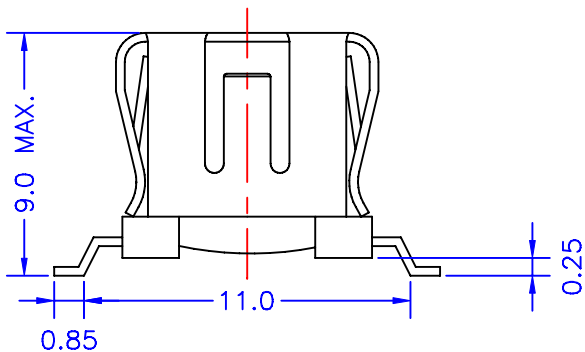
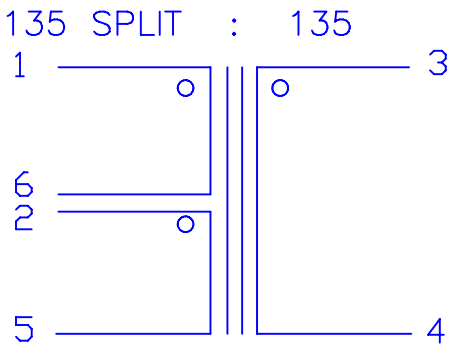




BLACK DOT PIN#1



ELECTRICAL CHARACTERISTICS: (50240 COMPATIBLE)

1. D.C.R. : 1-6 = 2-5 = 3.65 OHM+/-10%, 3-4 = 6.34 OHM +/-10%
2. INDUCTANCE (@1KHZ, 1Vrms, SERIES) 1-5 = 15mH MIN.(2-6 SHORT)
3. LEAKAGE INDUCTANCE (@10KHZ, 1Vrms, 2-6, 3-4 SHORT)
1-5 = 25uH MAX.
4. RETURN LOSS (REF. 135 OHM) @10K-200KHZ = 17dB MIN.
5. TURNS RATIO (@20KHZ, 1Vrms) 3-4 : 1-6 = 2+/-1%
2-5 : 1-6 = 1+/-1%
6. HI-POT (@1250VAC, 1mA, 2SEC.) PRI.-SEC.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE HDSL TRANSFORMER	
							DWG. NO. ATS-261	
	RELEASE	10/20/97	PAIR		SUEDY	UNITS: M/M	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	SHEET 1 OF 1		
						DATE	P/N:	DRAW
REVISIONS						10/20/97	CTA40700FA	<i>Pair</i>