


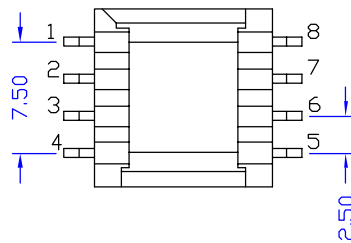




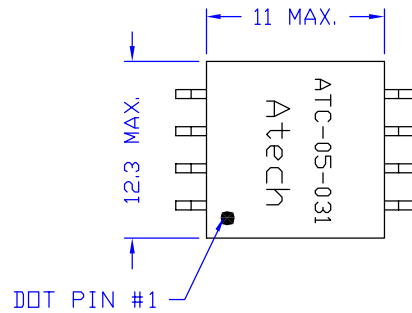

SUGGESTED PAD LAYOUT

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

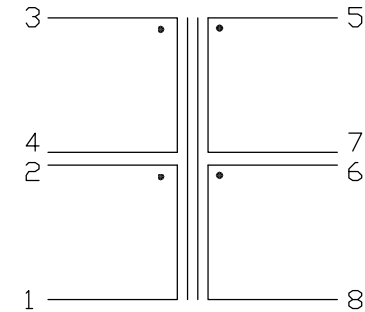

ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-2 = 115 mΩ MAX.
PIN 3-4 = 420 mΩ MAX.
PIN 5-7 (5-6,7-8 SHORT) = 7.5 mΩ MAX.
- INDUCTANCE (@0.1Vrms, 1KHz) :
PIN 3-4 = 253 μH $\pm 10\%$.
- LEAKAGE INDUCTANCE (@0.1Vrms, 100KHz) :
PIN 3-4 (5-6-7-8 SHORT) : 7.5 μH MAX.
- TURN RATIO (@0.1Vrms, 800KHz) :
PIN 3-4:2-1 = 4.8 $\pm 2\%$.
PIN 3-4:5-7(5-6,7-8 SHORT) = 12 $\pm 2\%$.
- HI-POT (@1000VAC, 1mA, 2SEC) :
PIN 1-8 (2-4, 5-6, 7-8 SHORT)

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004		TITLE TRANSFORMER
								DWG. NO. ATC-05-031
	RELEASE	06/23/2005	BART	EEFLYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						06/23/05		