

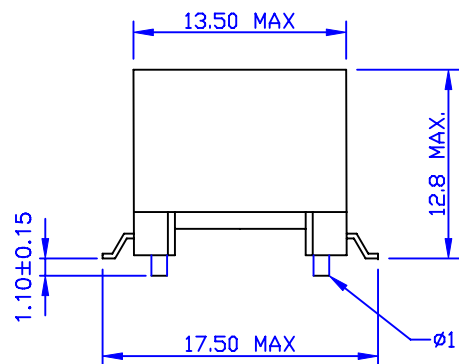


DOT PIN#1

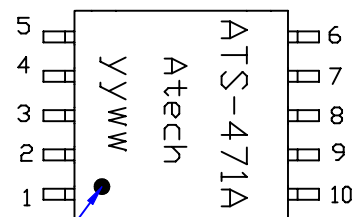

# ELECTRICAL CHARACTERISTICS : <FOR ALCATEL CHIPSET>

1. D.R.C. : 1-3=2-4=0.58 OHM±12% 10-8=9-7=0.59 OHM±12%
2. INDUCTANCE : <@10KHZ, 0.1Vrms, W/H 2-3 SHORT> 1-4=430uH±5%
3. LEAKAGE INDUCTANCE : <@100KHZ, 0.1Vrms, 2-3, 8-9, 10-7 SHORT> 1-4=10uH MAX.
4. TURN RATIO : <@100KHZ, 0.1Vrms, 2-3, 9-8 SHORT> 1-4:10-7=1±1%
5. HI-POT : <@1875VAC, 1mA, 1SEC> PRI-SEC
6. WORKING TEMP : 0~70 DEG.C.
7. LEAD FREE

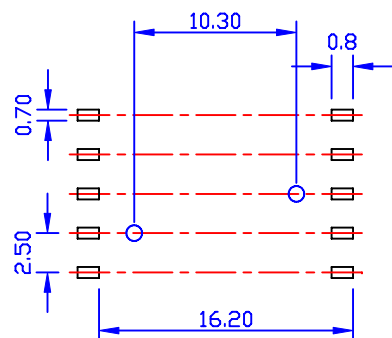

|           |                       |            |      |        |        |                                                                                  |          |                     |
|-----------|-----------------------|------------|------|--------|--------|----------------------------------------------------------------------------------|----------|---------------------|
|           |                       |            |      |        |        | <b>Atech®</b><br>Atech Technology Co., Ltd.<br>TEL:02)2794-6667 FAX:02)2794-8004 | TITLE    | ADSL<br>TRANSFORMER |
| A         | DELTE D UL &MFG. MARK | 01/18/2007 | PAIR | WILLIE | EUGENE |                                                                                  | DWG. NO. | ATS-471AN           |
|           | RELEASE               | 05/11/2004 | PAIR | EUGENE | SUEDY  | UNITS:                                                                           | SAFETY   | SHEET 1 OF 1        |
| NO.       | DESCRIPTION           | DATE       | BY   | CHK    | APPD   | M/M                                                                              |          |                     |
|           |                       |            |      |        |        | DATE                                                                             |          | DRAW                |
| REVISIONS |                       |            |      |        |        | 05/11/04                                                                         |          | Pair                |