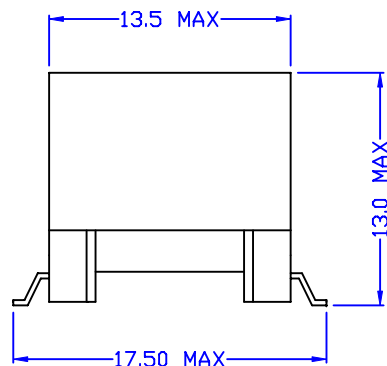
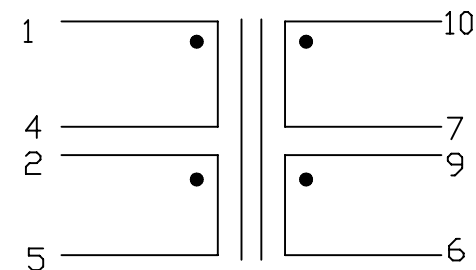
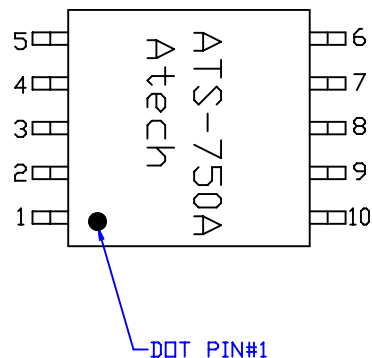


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-4= 2-5 = 500 mOHM MAX
PIN 9-6 = 10-7 = 257 mOHM MAX.
- INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 410 uH ±5%.
- LEAKAGE INDUCTANCE (@300KHz, 0.1Vrms) :
PIN 1-5 (2-4,6-7-9-10 SHORT) = 8.6 uH MAX.
- INTERWINDING CAP(@100KHz, 0.1Vrms) :
PIN 1-10 (2-4, 7-9 SHORT) = 37 pF MAX.
- TURN RATIO (@1MHz, 0.1Vrms) :
PIN 1-5 (2-4 SHROT) : 10-6 (9-7 SHROT) = 2 ±2%.
- HI-POT (@1875VAC, 1mA, 2S) :
PRI-SEC
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004	TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-750AR	
A	DELTE D MFG. MARK	01/18 /2007	PAIR	WILLIE	EUGENE			
	RELEASE	02/20 /2006	PAIR	EEFLYS	SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N : CTA41300ZA	DRAW <i>Pair</i>
REVISIONS						02/20/06		