
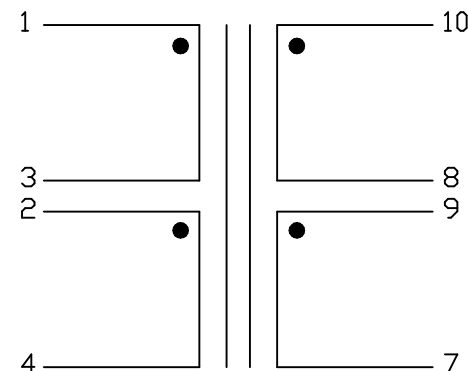
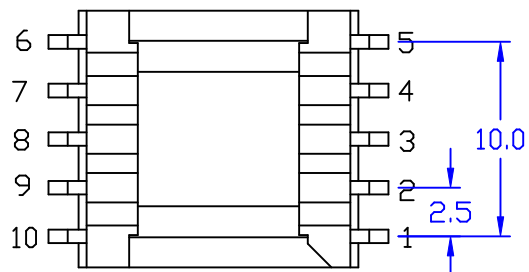

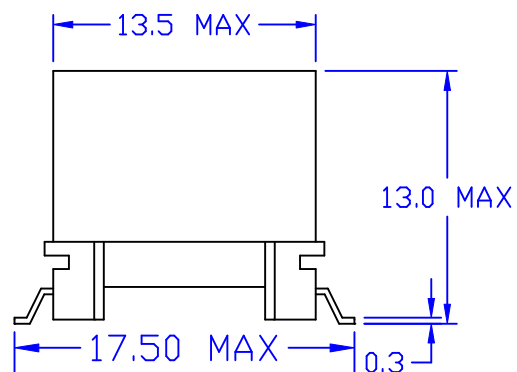


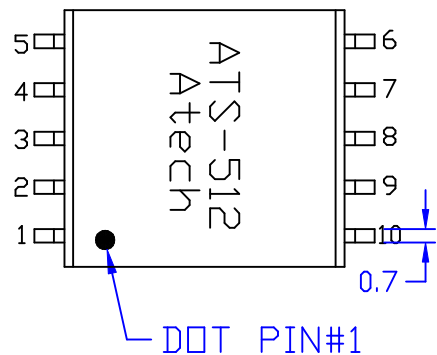

ELECTRICAL CHARACTERISTICS : <C1926 COMPATIBLE>

- DCR : PIN 1-3 = 2-4 = 0.334 Ω $\pm$ 10%
PIN 7-9 = 8-10 = 1.52 Ω $\pm$ 10%
- INDUCTANCE : (<@10 KHZ, 1 Vrms, W/H 8-9 SHORT) 10-7 = 5 mH $\pm$ 10%
- LEAKAGE INDUCTANCE : (<@100 KHZ, 0.1 Vrms, W/H 2-3, 8-9, 10-7 SHORT)
1-4 = 10 μ H MAX.
- INTERWINDING CAP. : (<@10 KHZ, 0.1 Vrms, W/H 2-3, 8-9 SHORT)
1-10 = 35 pF MAX.
- TURN RATIO : (<@15 KHZ, 1 Vrms) 10-8 : 9-7 = 1 $\pm$ 1%
1-3 : 2-4 = 1 $\pm$ 1%
10-7 (8-9 SHORT) : 1-4 (2-3 SHORT) = 2 $\pm$ 1%
- HI-POT : (<@1875 VAC, 1 mA, 2 SEC) 10-1 (8-9, 2-3 SHORT)
- RoHS COMPLIANCE.

						Atech [®] Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSSL TRANSFORMER	
							DWG. NO. ATS-512R	
	RELEASE	01/06/2006	BART		SUEDY	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		DRAW <i>Pair</i>
REVISIONS						01/06/06		