
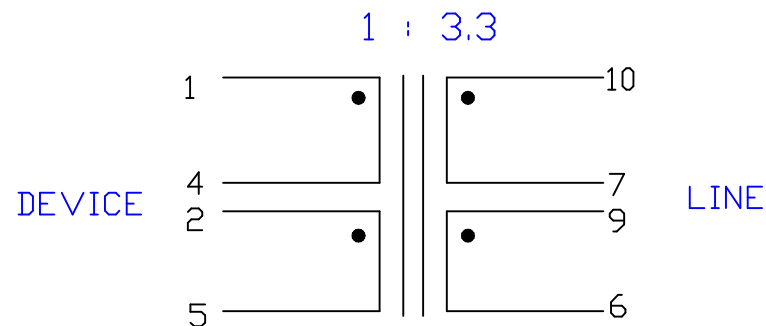
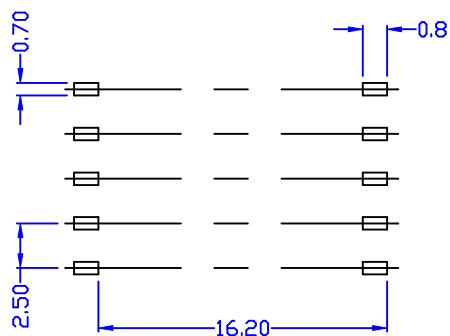
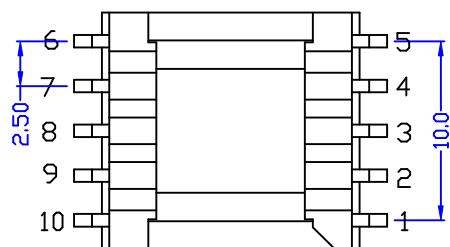
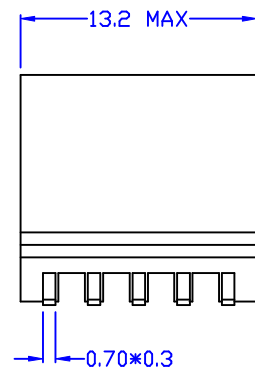
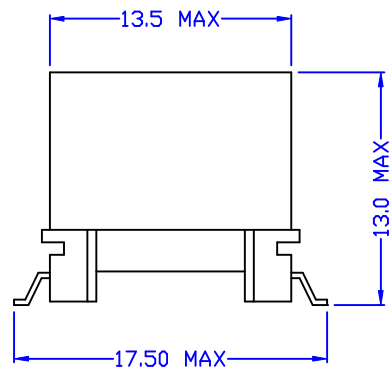


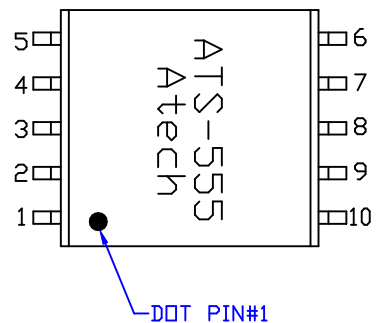

ELECTRICAL CHARACTERISTICS : (FOR 51130 COMPATIBLE)

- D.C.R. : PIN 4-1 = 0.268 OHM $\pm$ 12%
PIN 2-5 = 0.2 OHM $\pm$ 12%
PIN 6-9 = 7-10 = 0.723 OHM $\pm$ 12%
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 6-10 (9-7 SHORT) = 780uH $\pm$ 6%
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 6-10 (W/H 7-9 2-4 1-5 SHORT) = 20uH MAX.
- INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 6-5 (W/H 7-9 2-4 SHORT) = 30pF MAX.
- TURN RATIO (@15KHz, 0.1Vrms) :
PIN 6-10 (9-7 SHORT) : PIN 5-1 (2-4 SHORT) = 3.3 $\pm$ 1%
- HI-POT (@3000VAC, 1mA, 1SEC) : PIN 6-5 (7-9 2-4 SHORT)
- TRAY PACKING
- RoHS COMPLIANCE

						Atech®		TITLE	ADSL TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-555TR
						TEL:0212794-6667 FAX:0212794-8004			
RELEASE		03/22/2005	PAIR	SUEDY	SUEDY	UNITS:	SAFETY		SHEET 1 OF 1
DESCRIPTION		DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	P/N	DRAW	Pair
						03/22/05	CTA41302ZA		