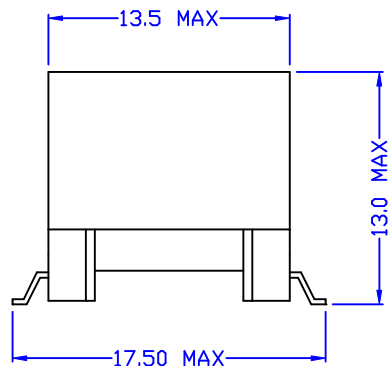
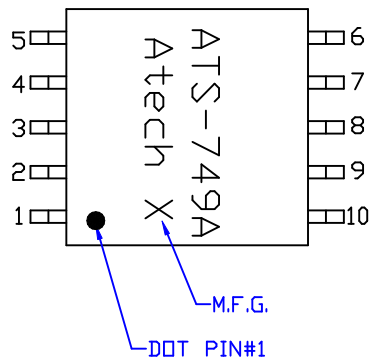


ELECTRICAL CHARACTERISTICS :

1. D.C.R. : PIN 1-4 = 2-5 = 506 mΩ MAX.
PIN 9-6 = 10-7 = 239 mΩ MAX.
2. INDUCTANCE (@10KHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) = 410uH ± 5%
3. LEAKAGE INDUCTANCE (@300KHz, 0.1Vrms) :
PIN 1-5 (2-4, 6-7-9-10 SHORT) = 7.4uH MAX.
4. INTERWINDING CAP (@100KHz, 0.1Vrms) :
PIN 1-10 (7-9, 2-4 SHORT) = 58 pF MAX.
5. TURN RATIO (@1MHz, 0.1Vrms) :
PIN 1-5 (2-4 SHORT) : 10-6 (9-7 SHORT) = 2.19 ± 2%
6. HI-POT (@1875VAC, 1mA, 2SEC) :
PRI-SEC
7. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	ADSL TRANSFORMER
							DWG. NO.	ATS-749AR
	RELEASE	02/20/2006	PAIR	EEFLYS	SUEDY		UNITS:	SAFETY
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1
						DATE	P/N	DRAW
REVISIONS						02/20/06	CTA413030A	<i>Pair</i>