
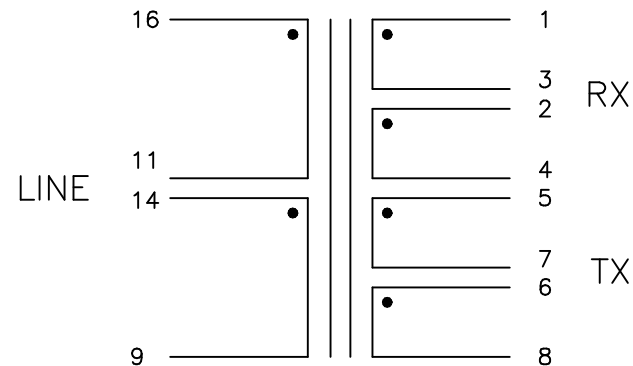


1. DCR : PIN 1-3 = 2-4 = 980 mΩHM MAX.
PIN 5-7 = 6-8 = 285 mΩHM MAX.
PIN 9-14 = 11-16 = 481 mΩHM MAX.
2. INDUCTANCE (@1KHZ, 0.1Vrms) :
PIN 9-16 (11-14 SHORT) : = 400 uH ±5%.
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (2-3, 5-6-7-8, 9-11-14-16 SHORT) = 15 uH MAX.
4. INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 9-1 (1-2-3-4, 9-11-14-16 SHORT) = 16 pF MAX.
PIN 5-9 (5-6-7-8, 9-11-14-16 SHORT) = 16 pF MAX.
5. TURN RATIO :
(@400KHZ, 0.1Vrms) :
PIN 16-9 : 1-4(2-3, 11-14 SHORT) = 1±3%.
PIN 16-9:5-8 (11-14, 6-7 SHORT) = 4.25±1%.
6. HI-POT : (@1875VAC, 1mA, 2S)
LINE-RX, LINE-TX
7. RoHS COMPLIANCE.

					Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE ADSL TRANSFORMER		
B	T/R	05/11/2006	PAIR	MICHAEL		EUGENE	DWG. NO.	
A	SPEC.	11/25/2005	BART	MICHAEL		SUEY	ATS-718CR	
	RELEASE	10/26/2005	BART	MICHAEL		SUEY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
REVISIONS						DATE 10/26/05	P/N: CTA413034A	DRAW <i>Pair</i>