
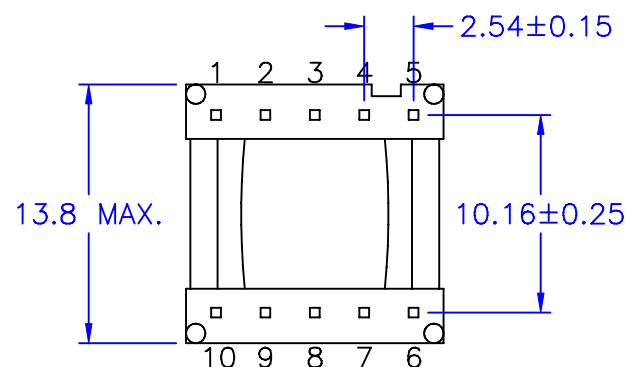
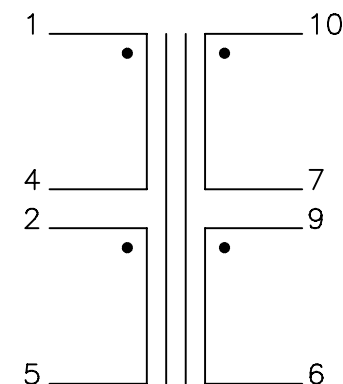



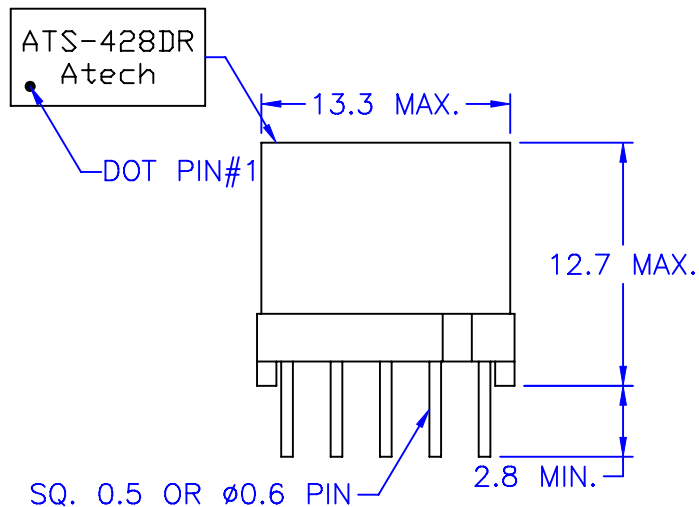

ELECTRICAL CHARACTERISTICS : (51511 COMPATIBLE)

- DCR : PIN 6-9 = 10-7 = 0.55 Ω HM MAX.
PIN 5-2 = 0.15 MAX.
PIN 4-1 = 0.1 Ω HM MAX.
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 10-6 (7-9 SHORT) = 800uH $\pm$ 5%
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 10-6 (2-4 1-5 7-9 SHORT) = 15uH MAX.
- INTERWINDING CAP. (@100KHZ, 0.1Vrms) :
PIN 1-10 (2-4 9-7 SHORT) = 45pF MAX.
- TURN RATIO (@500KHZ, 1Vrms, 2-4 7-9 SHORT) : PIN 10-6 : 1-5 = 3.3 $\pm$ 1%
- HI-POT (@4KVAC, 1mA, 1MIN) : PIN 1-10 (2-4 7-9 SHORT)
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL(02)2794-6667 FAX(02)2794-8004		TITLE TRANSFORMER	
								DWG. NO. ATS-428DR	
	RELEASE	05/23/2006	PAIR	VINCENT	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTA41303BA		DRAW <i>Pair</i>
REVISIONS									