
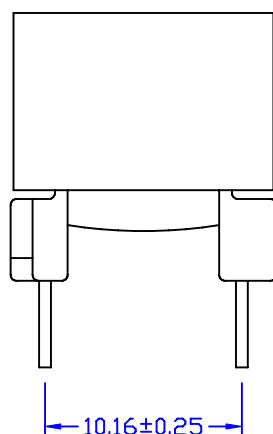
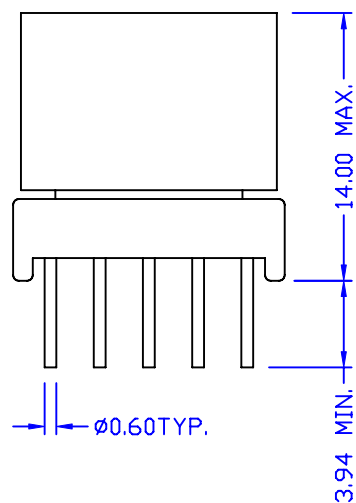
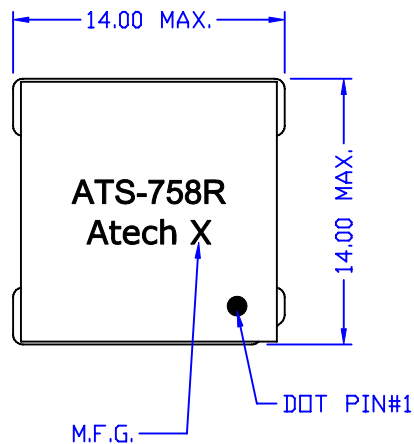


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-4 = 695 mΩ MAX.
PIN 2-5 = 695 mΩ MAX.
PIN 6-9 = 333 mΩ MAX.
PIN 7-10 = 242 mΩ MAX.
- INDUCTANCE (@10KHz, 0.1Vrms, 2-4 SHORT) :
PIN 1-5 = 410 μH ± 5%.
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms, 6-7-9-10, 2-4 SHORT)
PIN 1-5 = 10 μH MAX.
- TURNS RATIO (@20KHz, 1Vrms, 2-4, 7-9 SHORT) :
PIN 1-5:10-6 = 2 ± 3%
- HI-POT (@1500VAC, 1mA, 1MIN OR @1875VAC, 1mA, 2SEC) :
PRI-SEC
- RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-758R	
	RELEASE	02/27/2006	PAIR	AL	SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						02/27/06	CTA41303DA	Pair	