
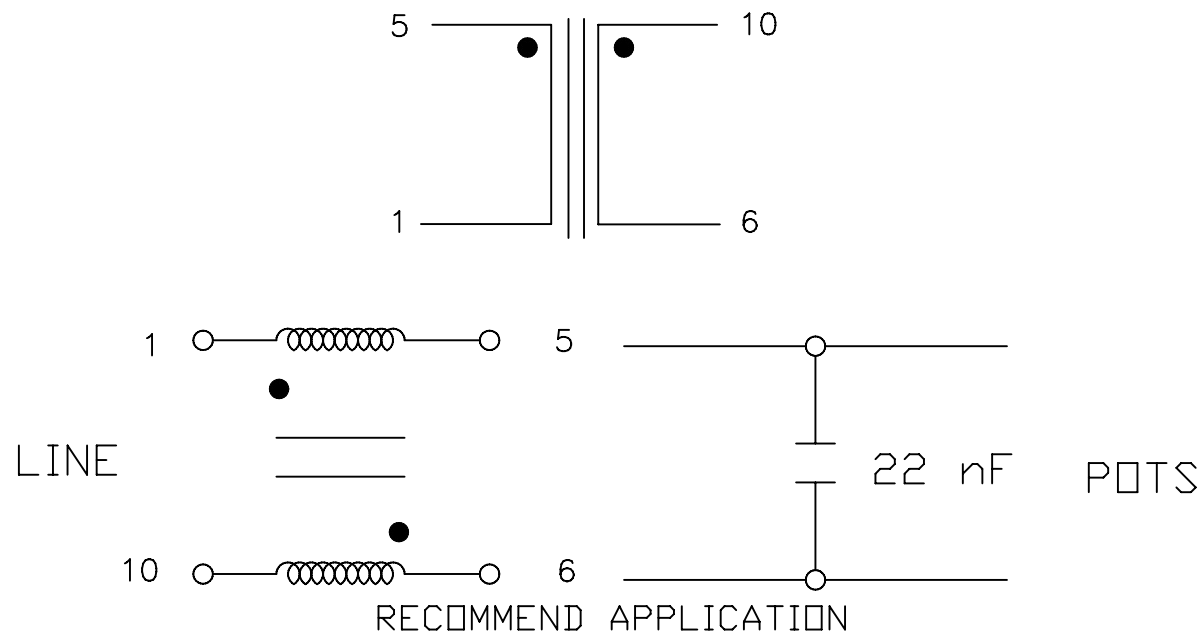
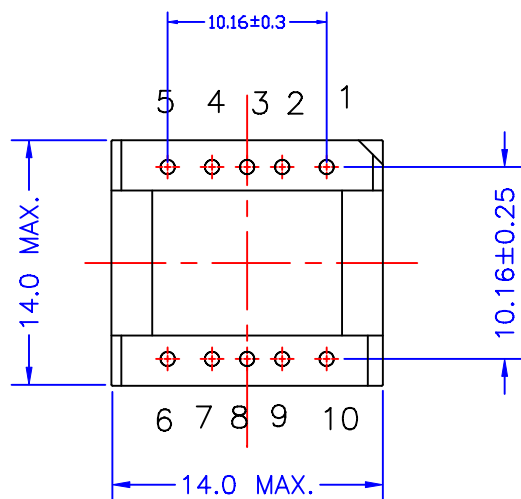


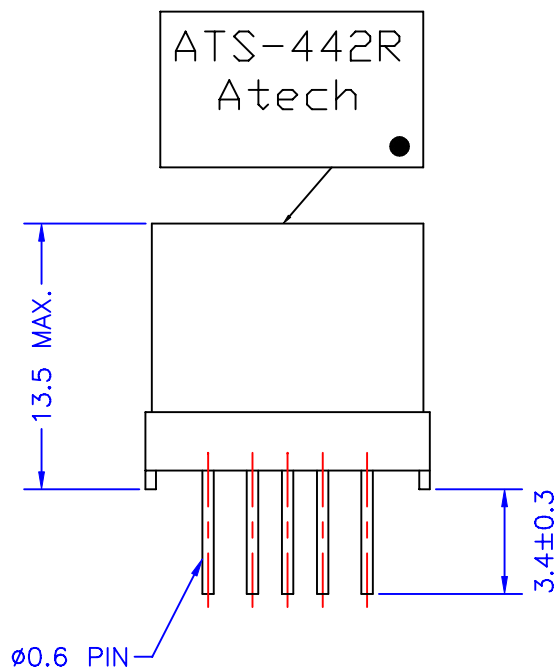

ELECTRICAL CHARACTERISTICS:

1. D.C.R. : PIN 1-5 = PIN 6-10 = 2.2 OHM±12%
2. INDUCTANCE: (@1KHZ, 0.1Vrms, PIN 5-6 SHORT) : PIN 1-10=16 mH±5%
 PIN 1-5 = PIN 6-10 = 4mH ± 5%
 (@W/H 60 mA DC) : PIN 1-10 = 15mH MIN.
 (@W/H 80 mA DC) : PIN 1-10 =10mH MIN.
 (@10KHZ, 0.1Vrms) : PIN 1-5 = PIN 6-10 = 3.95mH TYP.
3. TURN RATIO (@140KHZ, 0.1Vrms) PIN 1-5 : PIN 6-10 =1±2%
4. HI-POT (@1KVAC, 1mA, 2SEC.) : PRI - SEC
5. RoHS COMPLIANT

						Atech®		TITLE
						Atech Technology Co., Ltd.		INDUCTOR
						TEL:(02)2794-6667 FAX:(02)2794-8004		DWG. NO.
								ATS-442R
A	MARKING & PIN DIM	10/18/2007	PAIR	WILLIE	EUGENE	UNITS:	SAFETY	SHEET 1 OF 1
	RELEASE	11/23/2006	PAIR		SUEDY	M/M		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						11/23/06	CTA41303GA	Pair