
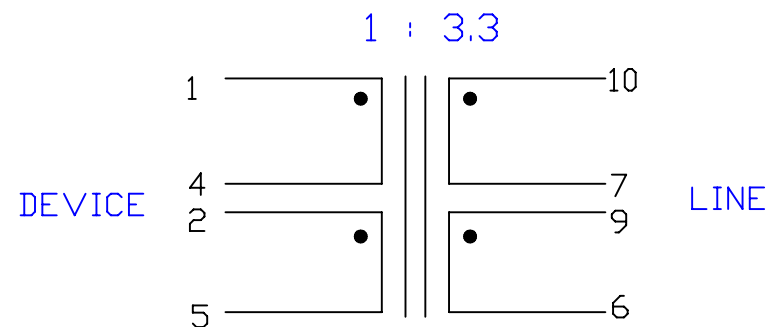
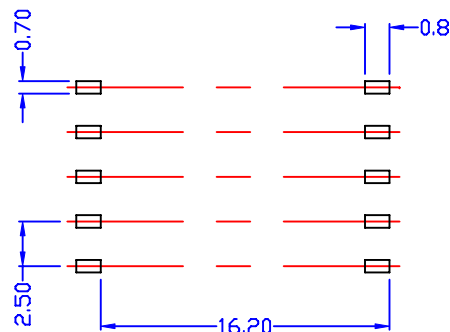
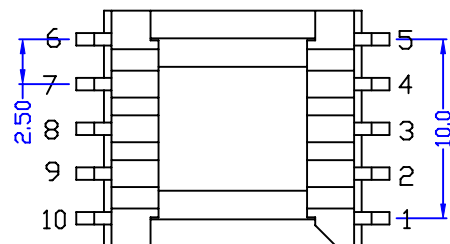
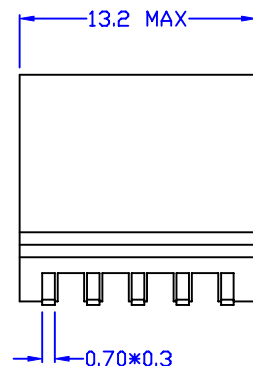


DOT PIN#1

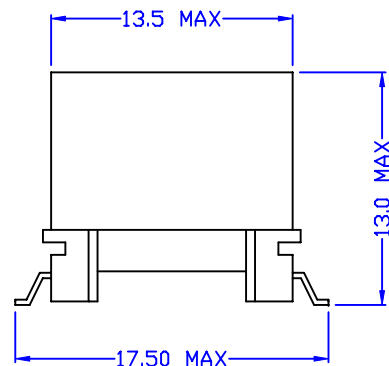

ELECTRICAL CHARACTERISTICS : <FOR 51130 COMPATIBLE>

- D.C.R. : PIN 4-1 = $0.268 \Omega \pm 12\%$
PIN 2-5 = $0.2 \Omega \pm 12\%$
PIN 6-9 = 7-10 = $0.723 \Omega \pm 12\%$
- INDUCTANCE (@10KHz, 0.1Vrms) : PIN 6-10 (9-7 SHORT) = $780\mu H \pm 6\%$
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 6-10 (W/H 7-9 2-4 1-5 SHORT) = $20\mu H$ MAX.
- INTERWINDING CAP. (@100KHz, 0.1Vrms) :
PIN 6-5 (W/H 7-9 2-4 SHORT) = $30pF$ MAX.
- TURN RATIO (@15KHz, 0.1Vrms) :
PIN 6-10 (9-7 SHORT) : PIN 5-1 (2-4 SHORT) = $3.3 \pm 1\%$
- HI-POT (@3000VAC, 1mA, 1SEC) : PIN 6-5 (7-9 2-4 SHORT)
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:02)2794-6667 FAX:02)2794-8004		TITLE ADSL TRANSFORMER	
								DWG. NO. ATS-555R	
	RELEASE	12/08 /2006	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						12/08/06	CTA41303HA	Pair	