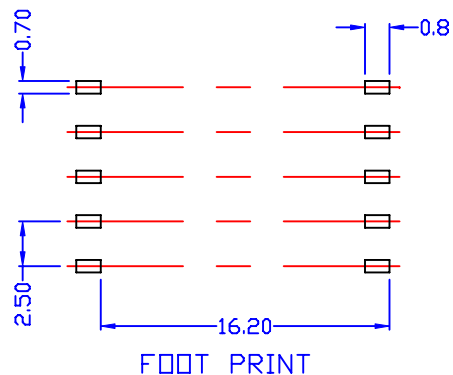
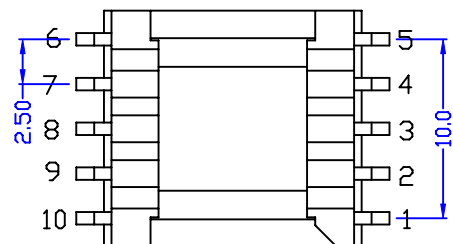
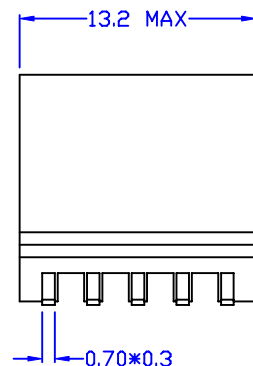
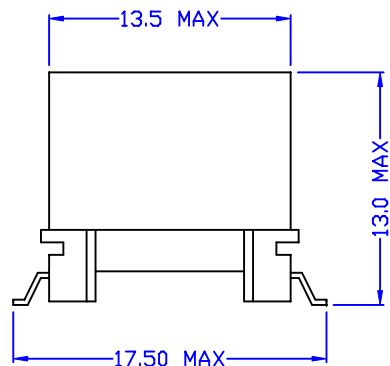
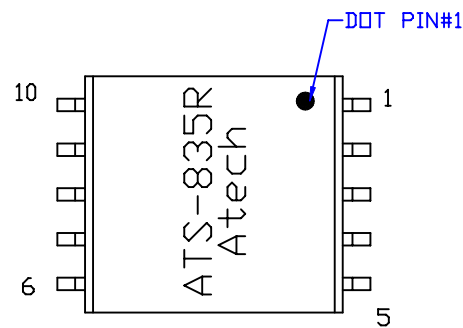


ELECTRICAL CHARACTERISTICS :

- D.C.R. : PIN 1-4 = 700 mΩHM±10%
PIN 2-5 = 700 mΩHM±10%
PIN 9-6 = 420 mΩHM±10%
PIN 10-7 = 410 mΩHM±10%
- INDUCTANCE (@10KHz, 0.1Vrms, ALC=OFF) :
PIN 1-5 (2-4 SHORT) = 410 uH±5%
- LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms) :
PIN 1-5 (W/H 2-4,6-7-9-10 SHORT) = 15uH MAX.
- LONGITUDINAL BAL(@1.1MHZ, 2-4,7-9 SHORT, 6-10 W/H 100 ΩHM) :
PIN 1-5 = 50dB MIN.
- T.H.D (@30KHZ, 1Vrms, 2-4, 7-9 SHORT, 6-10 W/H 100 ΩHM) :
PIN 1-5 = -90dB MAX.
- TURN RATIO (@100KHz, 0.1Vrms 2-4,7-9 SHORT) :
PIN 1-5 : PIN 10-6 = 2 ±2%
- HI-POT (@1500VAC, 1mA, 2SEC) : PRI-SEC
- RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:0202794-6667 FAX:0202794-8004	TITLE	ADSL TRANSFORMER
A	CHANGE D.C.R	04/08 /2008	Pair	Willie	Eugene		DWG. NO.	ATS-835R
	RELEASE	12/13 /2006	PAIR	WILLIE	EUGENE	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N: CTA41303JA	DRAW <i>Pair</i>
REVISIONS						12/13/06		