
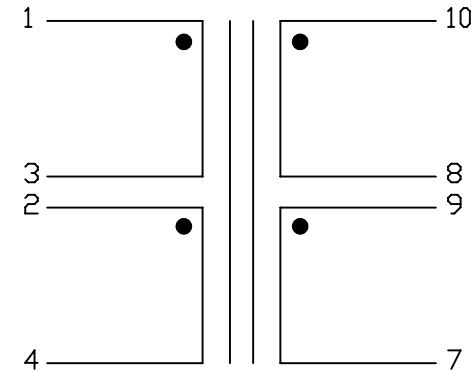

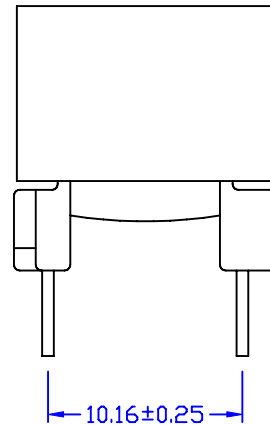
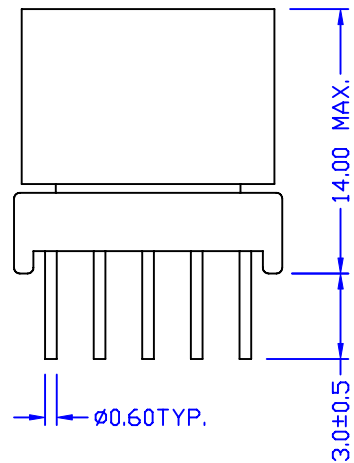


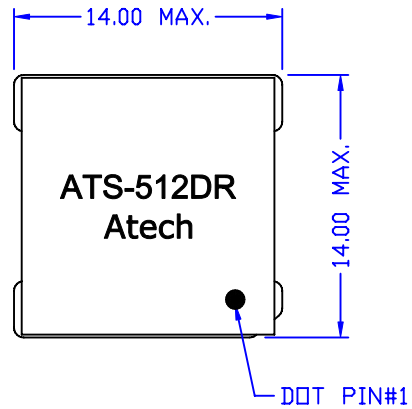

ELECTRICAL CHARACTERISTICS : <C1926 COMPATIBLE>

- DCR : PIN 1-3 = 2-4 = 0.334 OHM $\pm$ 10%
PIN 7-9 = 8-10 = 1.52 OHM $\pm$ 10%
- INDUCTANCE : <@10 KHZ, 1 Vrms, W/H 8-9 SHORT> 10-7 = 5 mH $\pm$ 10%
- LEAKAGE INDUCTANCE : <@100 KHZ, 0.1 Vrms, W/H 2-3, 8-9, 10-7 SHORT>
1-4 = 10 uH MAX.
- INTERWINDING CAP. : <@10 KHZ, 0.1 Vrms, W/H 2-3, 8-9 SHORT>
1-10 = 35 pF MAX.
- TURN RATIO : <@15 KHZ, 1 Vrms> 10-8 : 9-7 = 1 $\pm$ 1%
1-3 : 2-4 = 1 $\pm$ 1%
10-7 (8-9 SHORT) : 1-4 (2-3 SHORT) = 2 $\pm$ 1%
- HI-POT : <@1875 VAC, 1 mA, 2 SEC> 10-1 (8-9, 2-3 SHORT)
- RoHS COMPLIANCE.

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ADSL TRANSFORMER	
B	PIN DIM 3.0	10/24/2007	PAIR	WILLIE	EUGENE		DWG. NO.	
A	ADD PIN#3	08/21/2007	PAIR	WILLIE	EUGENE		ATS-512DR	
	RELEASE	06/25/2007	PAIR		SUEDY		UNITS: M/M	SAFETY
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						06/25/07	CTA41303NA	Pair