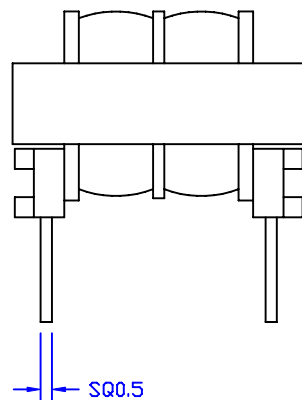
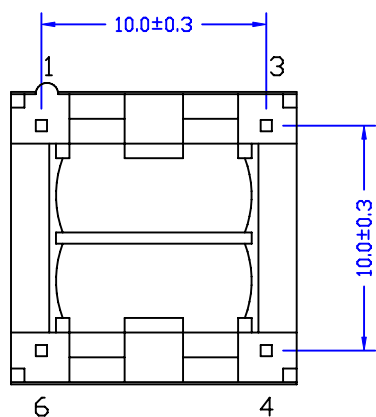
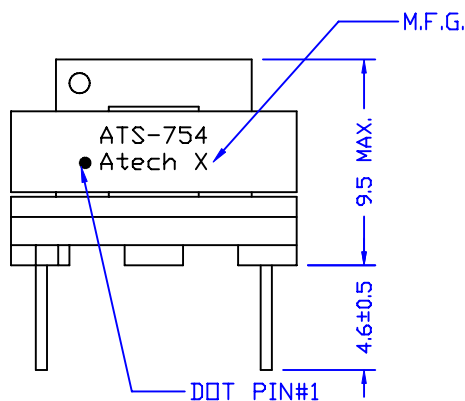
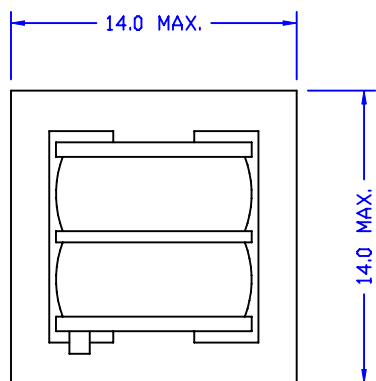


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 1-3 = $1.6 \Omega \pm 10\%$
PIN 4-6 = $1.6 \Omega \pm 10\%$
- INDUCTANCE (@10KHZ, 0.1Vrms) :
PIN 1-3 = $1.79\text{mH} \pm 5\%$
PIN 4-6 = $1.79\text{mH} \pm 5\%$
- TURN RATIO (@200KHz, 0.1Vrms) :
PIN 1-3 : 4-6 = $1 \pm 2\%$
- HI-POT (@500VAC, 1mA, 2SEC) : PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL:02-2794-6667 FAX:02-2794-8004	TITLE INDUCTOR	
B	DCR L	07/17/2006	PAIR	MICHAEL	EUGENE		DWG. NO. ATS-754	
A	SPEC.	08/29/2005	BART	MICHAEL	SUEDY			
	RELEASE	05/25/2005	BART	MICHAEL	SUEDY			
NO.	DESCRIPTION	DATE	BY	CHK	APPD	UNITS: M/M	SAFETY	SHEET 1 OF 1
						DATE 05/25/05	P/N: CTAH1300ZA	DRAW <i>Pair</i>
REVISIONS								